



Linear Colliders: ILC

Ties Behnke, DESY

- Linear Collider: some physics
- Linear Colliders: some accelerator issues (ILC, other technologies (CLIC): see lecture later by Tsesmelis on Friday
- Linear Colliders: Detectors

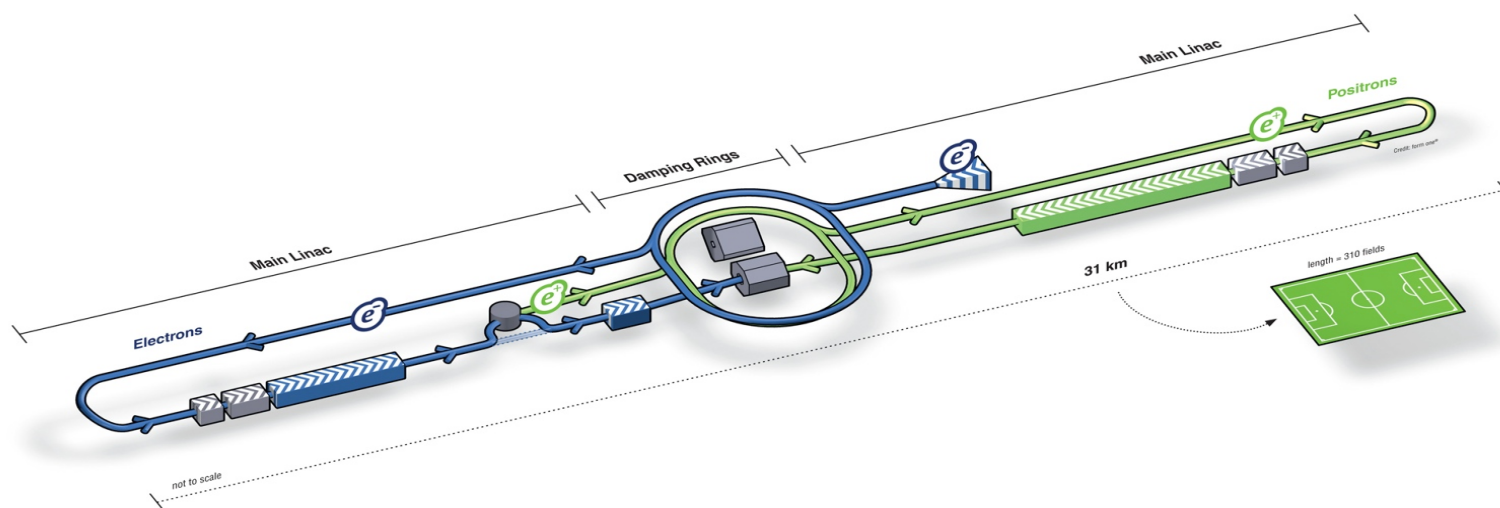

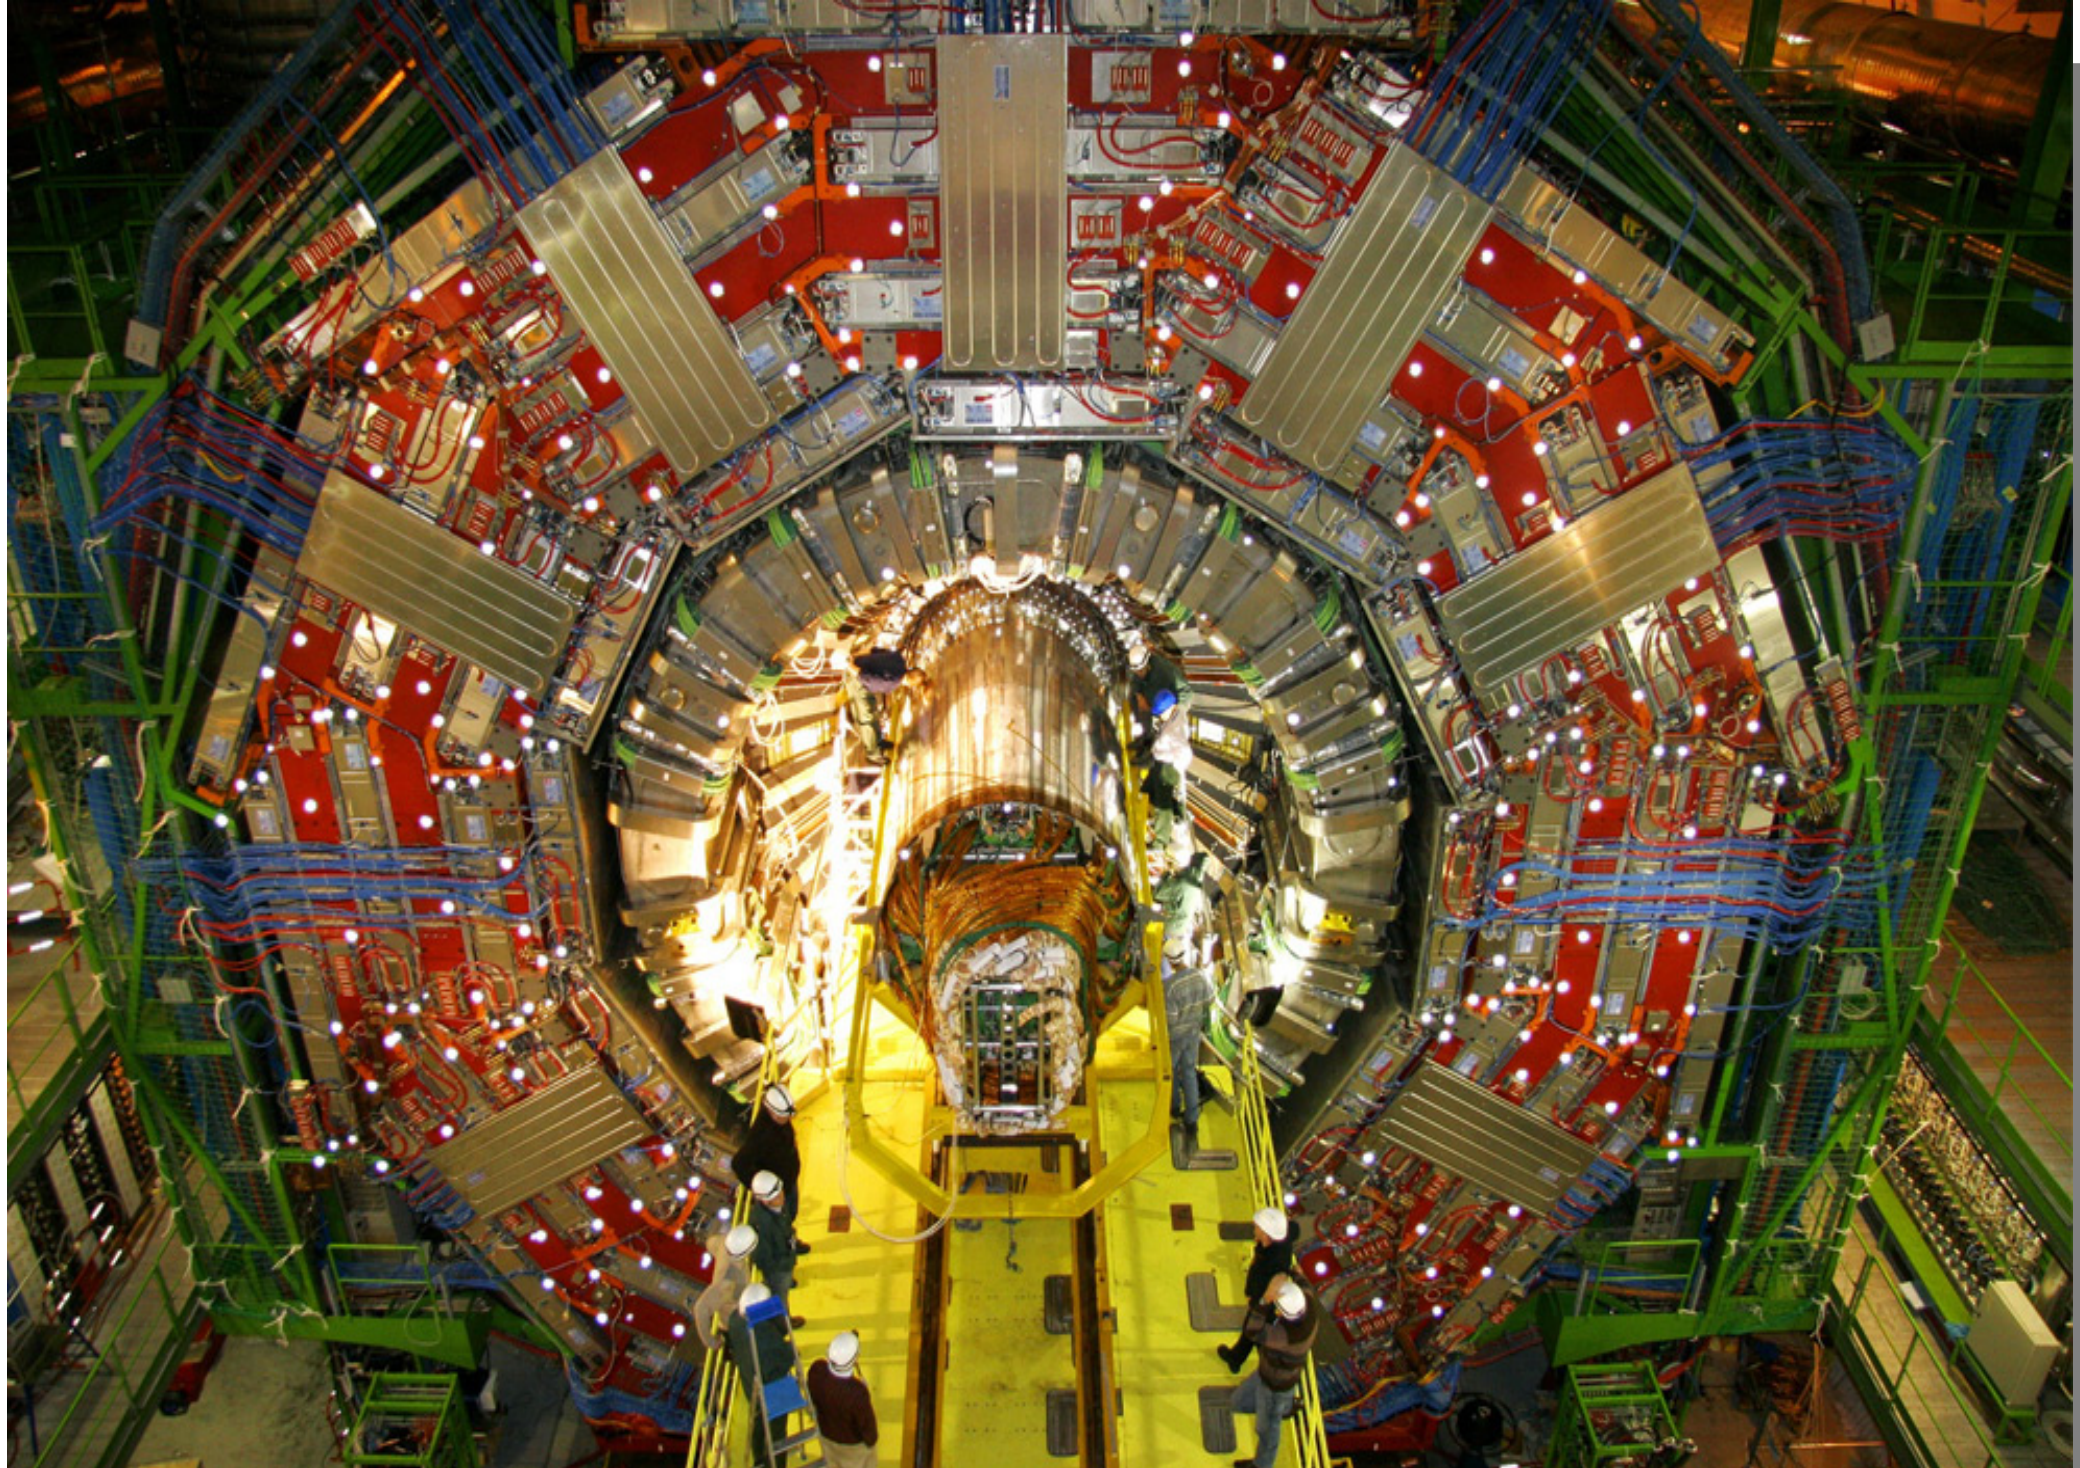



With LHC we will enter a new golden age of particle physics

Collider Types

Hadron Collider (pp)

Composite particles collide
 $E(\text{CM}) \ll 2 E(\text{beam})$

Strong interaction in initial state
Superposition with spectator jets

LHC: $\sqrt{s} = 14 \text{ TeV}$

Fraction of energy available for hard scattering

Small fraction of events analysed
Multiple triggers
No polarisation applicable

Lepton Collider (e^+e^-)

Pointlike particles collide
 $E(\text{CM}) \sim 2 E(\text{beam})$

Well defined initial state
Clear final state

ILC: $\sqrt{s} = 500 \text{ GeV} - 1 \text{ TeV}$


Nearly full energy of collision will be available for analysis

Most events in detector analysed
No hardware trigger, very open system
Polarisation of initial beams possible

Hadron - Lepton

Hadron machines and lepton machines have both made significant contributions to our current knowledge


Best example of recent years:
LEP/ Tevatron

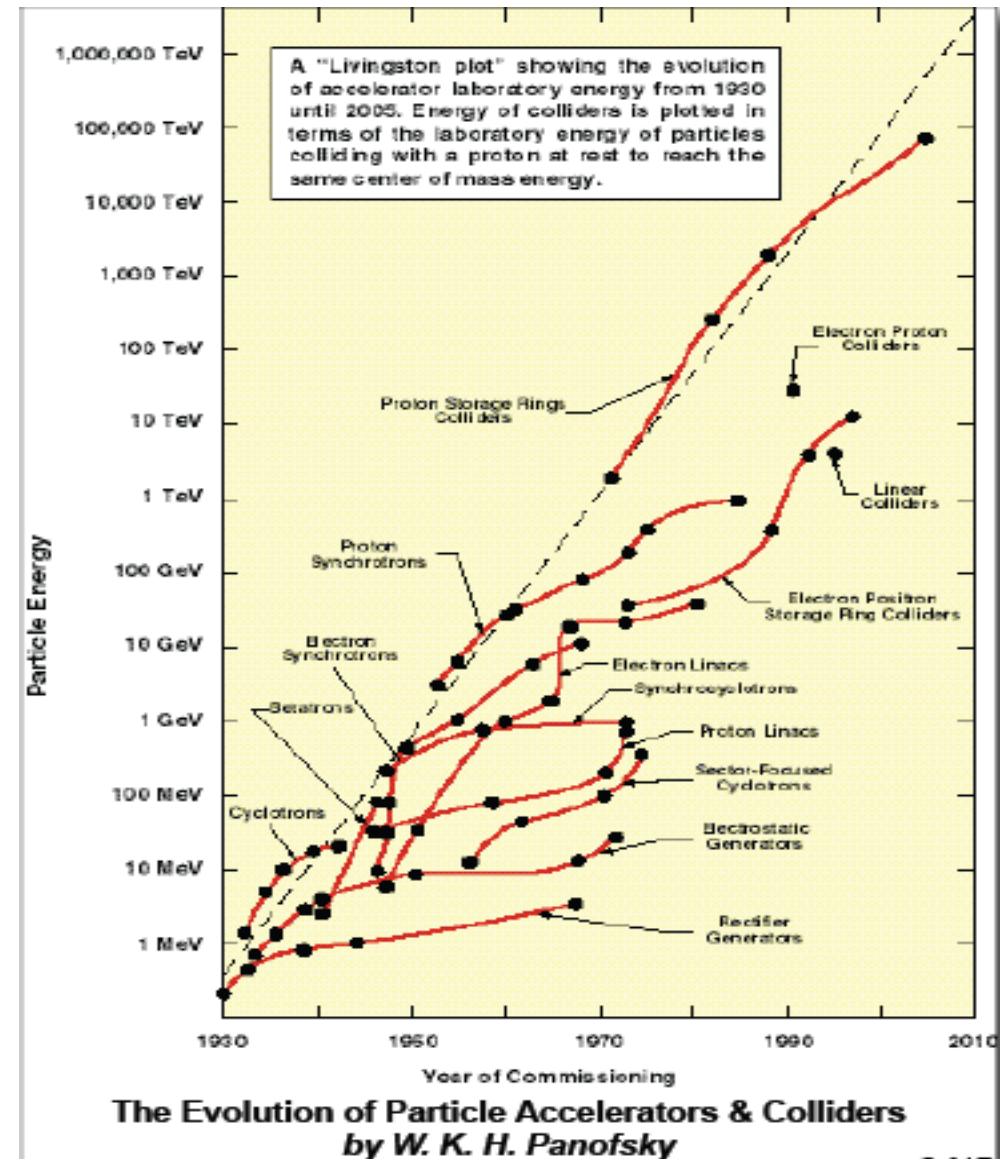

The e⁺e⁻ Advantage


Clean signatures: allow precision measurements

Sensitive to the theory at quantum level
(virtual particles, higher order effects)


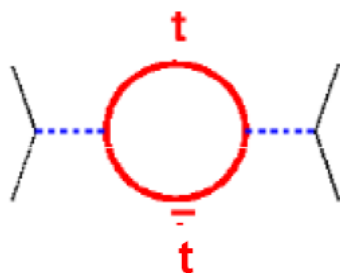


Explore known particles and states

Allow predictions for further still undiscovered particles, but whose properties are defined by theory at quantum level

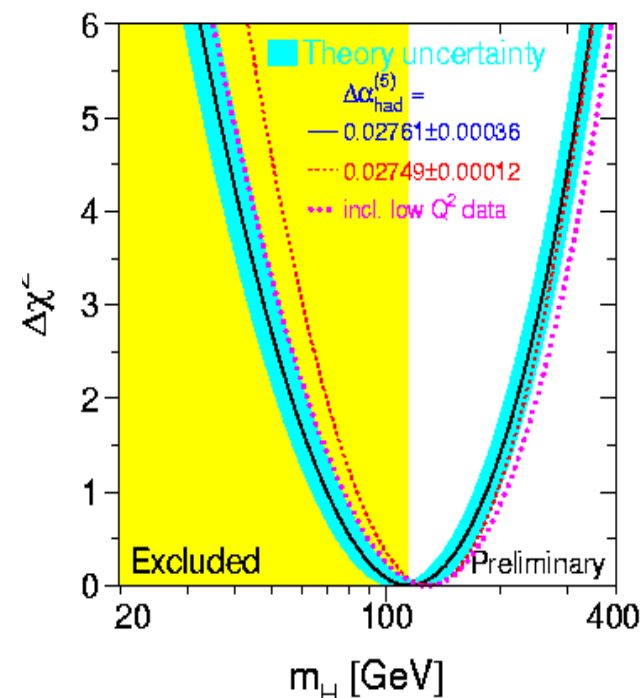

Prediction of top mass

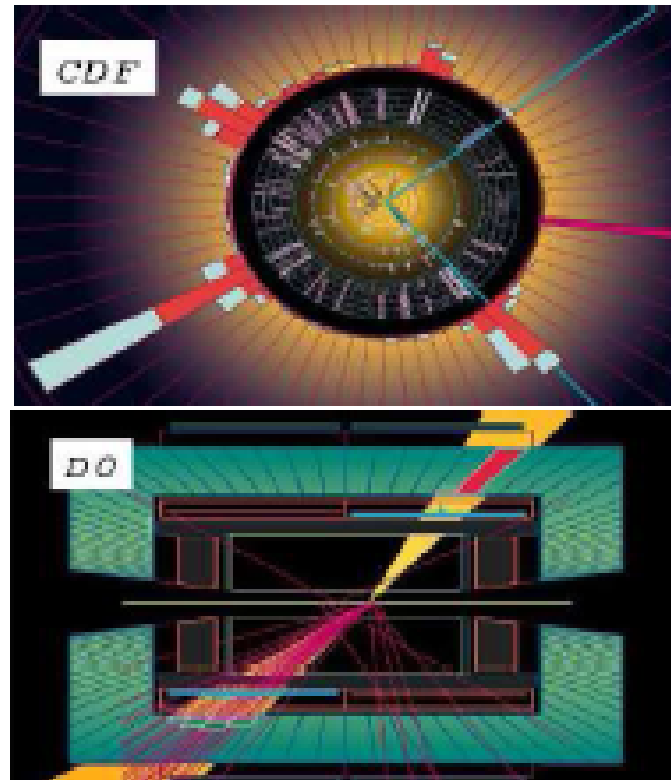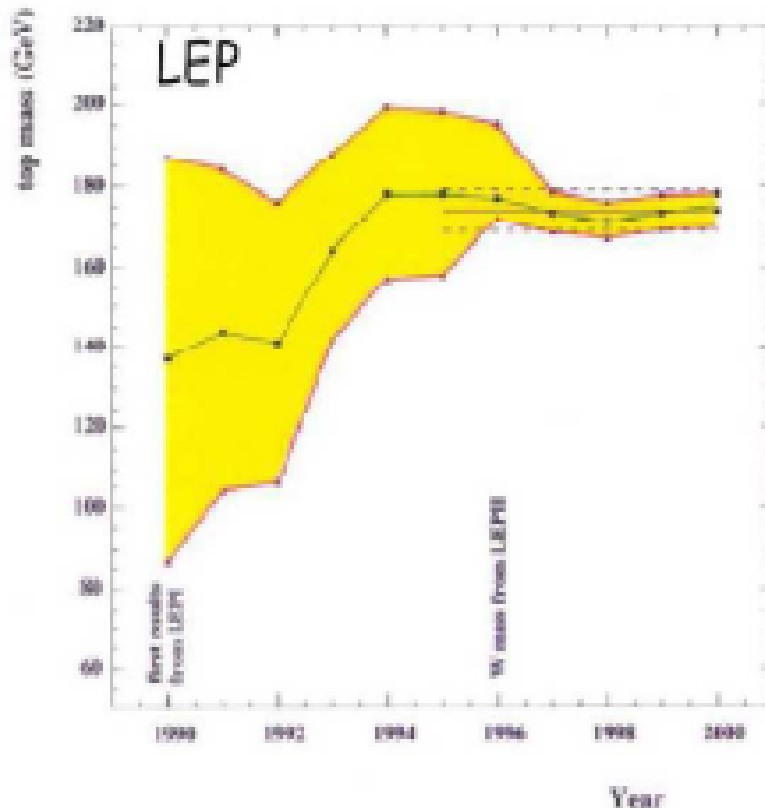

- Predicted discovery of the top quark at the Tevatron 1995:
- The history of physics is full of predicted discoveries:
- e^+ , n , \bar{n} , q , g , W , Z , c , b , t
- Future examples: Higgs, SUSY ??? -- see later


Physics Goals at the LC

- **Discovery of New Physics (NP)**
 - complementary to the LHC
 - large potential for **direct searches**
 - impressive potential also for **indirect searches via precision**
- **Unraveling the structure of NP**
 - precise determination of **underlying dynamics and parameters**
 - **model distinction** through model independent searches
- **High precision measurements**
 - **test of the Standard Model (SM)** with unprecedented precision
 - even smallest hints of NP could be observed
- **Discovery of new phenomena via high energy and high precision!**


Higgs at the ILC

Determination of mass and width of the Higgs:
most favorable (light Higgs) $ee \rightarrow Z \rightarrow ZH$


$ZH \rightarrow \mu\mu X$

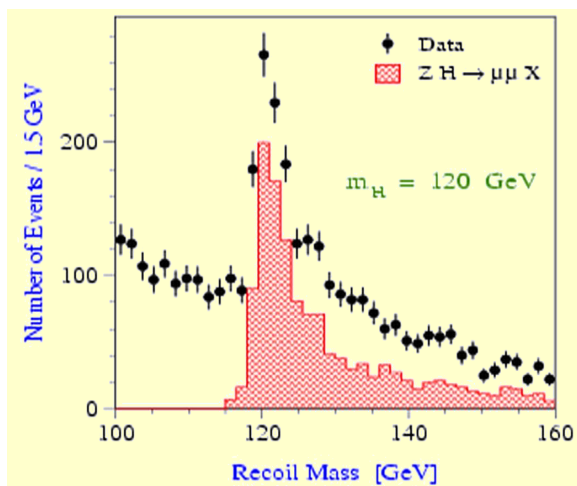

$ZH \rightarrow qqbb$

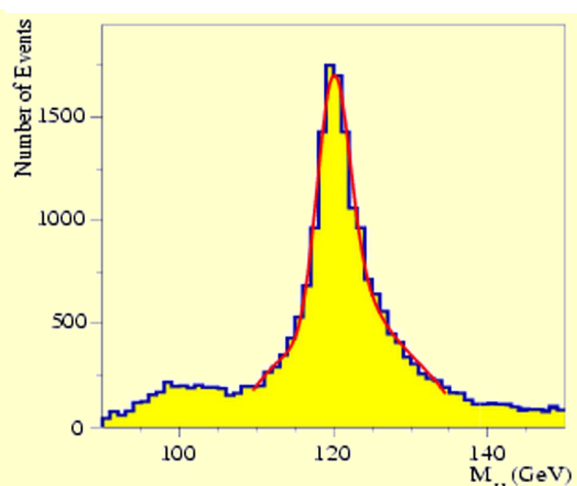

$ZH \rightarrow WW$

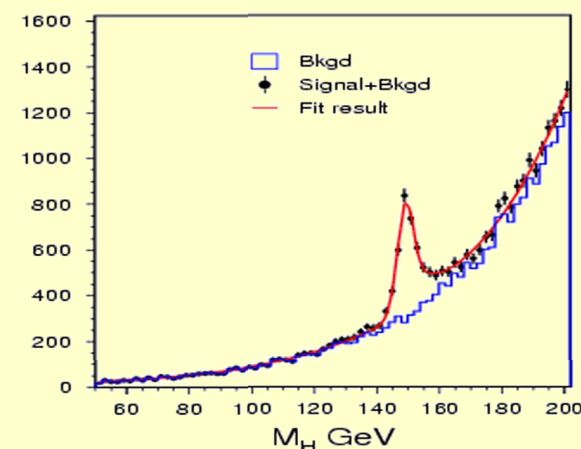

Clear signals in many channels:

mass

$M(\text{Higgs})$	ΔM
120 GeV	40 MeV
150 GeV	70 MeV
180 GeV	90 MeV

width:



to 5-10%

Beyond a Discovery


- complete test of our understanding of **mass**

→ can the Higgs explain the Z/W-mass?
is the existence of the Higgs enough?

→ can the Higgs explain the mass of the
fermions

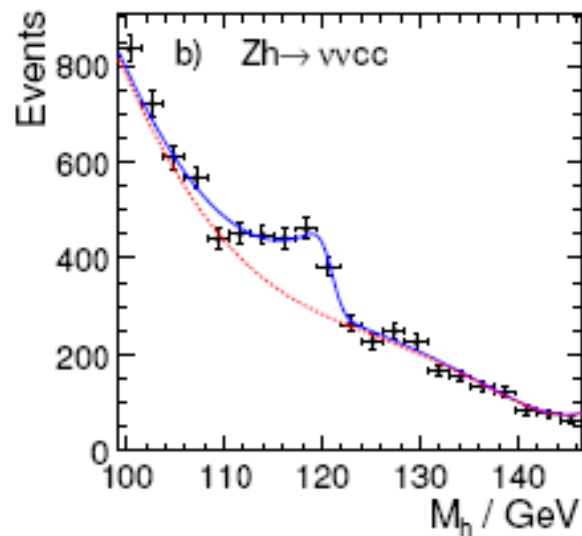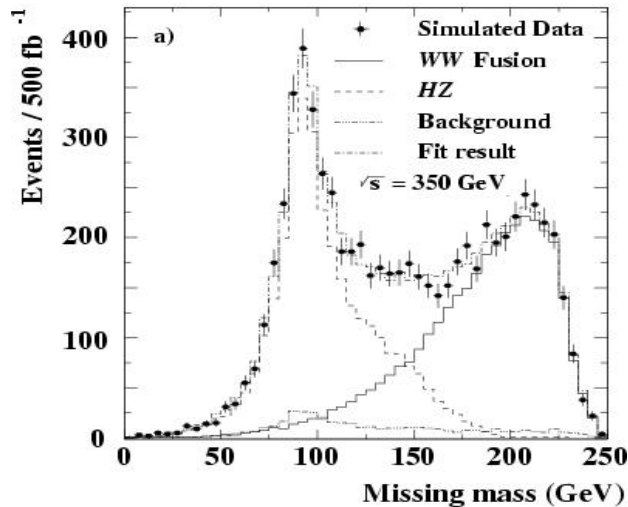


Couplings to fermions:

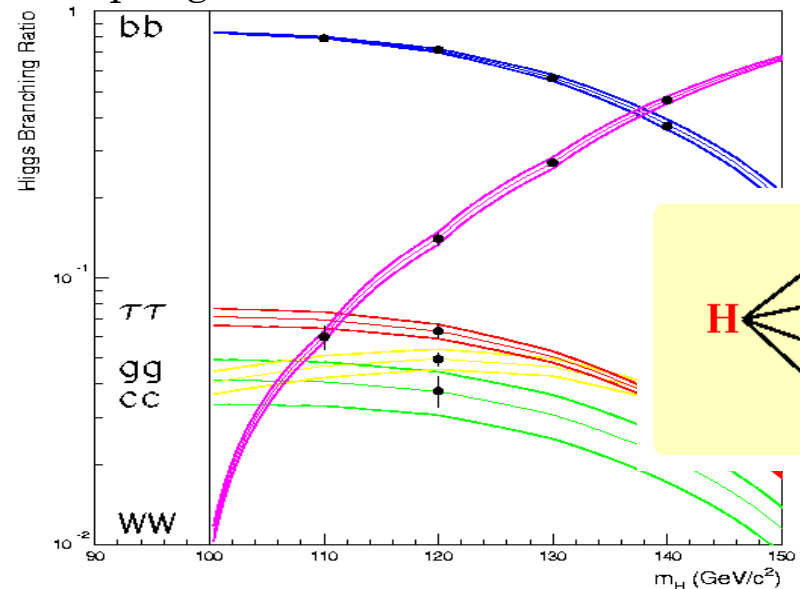

Physics Challenges

Coupling-Mass Relation

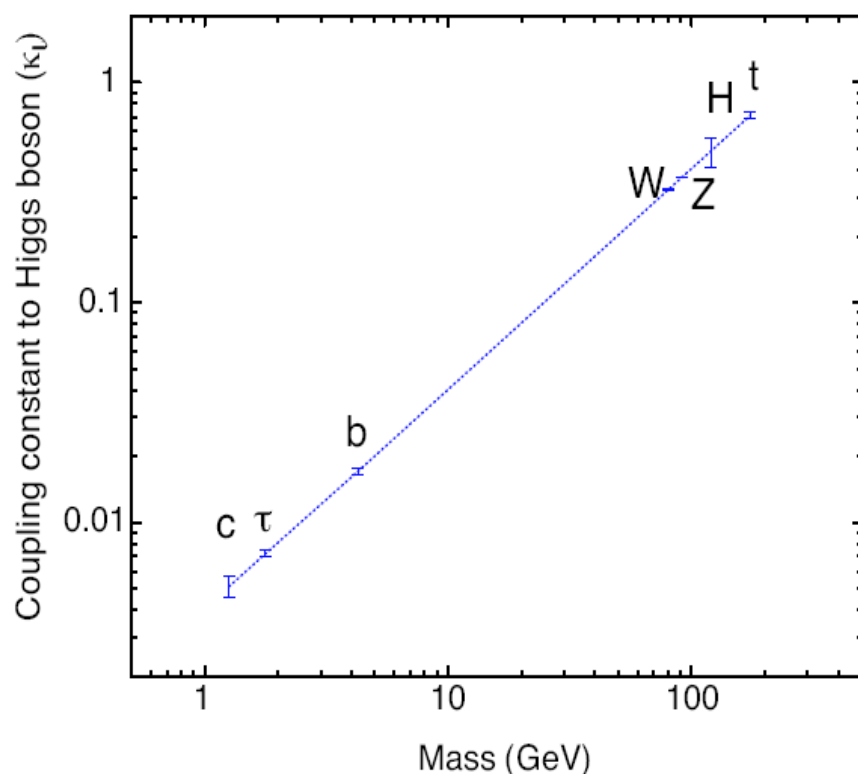

ACFA LC Study

Explore the complete Higgs Sector,
including Higgs self coupling

- Multi Jets in the final state
- need excellent jet-energy resolution to get decent measurement

“Fully” explore the physics at the Terascale, establish the models and mechanisms



SUSY at Colliders

- **Tevatron: slightly increased 1.8 -> 2 TeV, but 100 x higher lumi**
 - best prospects for trilepton signal: $\tilde{\chi}_2^0 \tilde{\chi}_1^+ \rightarrow \ell^+ \ell^- \tilde{\chi}_1^0 \ell^+ \nu \chi_1^0$
 - \tilde{t}, \tilde{b} searches, light SUSY Higgs in large tanbeta region
- **LHC: direct production of 'coloured' particles \tilde{q}, \tilde{g}**
 - Very large mass range in searches for **jets+missing energy up to 2-3 TeV**
 - electroweak-interacting particles as neutralinos/charginos mainly in decays!
 - e.g. at the LHC in cascades: $\tilde{g} \rightarrow \tilde{q}\tilde{q} \rightarrow \tilde{q}q\tilde{\chi}_2^0 \rightarrow \tilde{q}q\tilde{\tau}\tau \rightarrow \tilde{q}q\tau\tau\tilde{\chi}_1^0$
 - assumption about particle identities in chains
 - problem: **main background of SUSY is SUSY itself !**
 - **Test of SUSY relations not easy!**
- **ILC: direct production of all particles up to kinematical limit**
 - **clean signatures: precise tests of all SUSY assumptions!**

SUSY Signals

IF SUSY states are within the kinematic reach

Excellent reconstruction of the states and their properties
(complete reconstruction possible, absolute measurements)

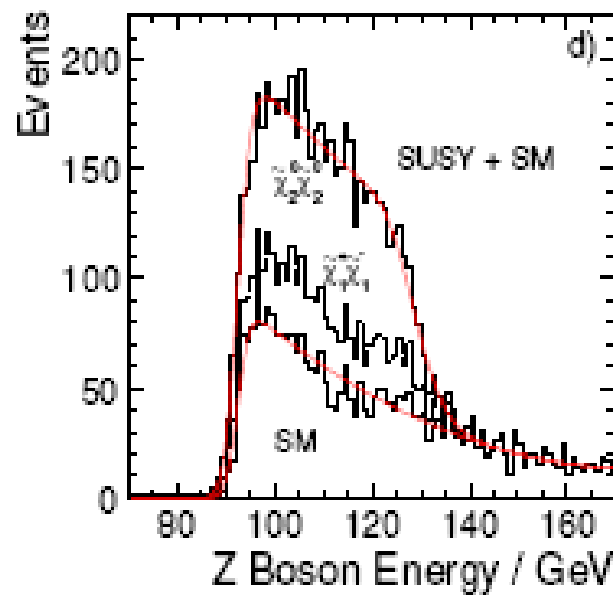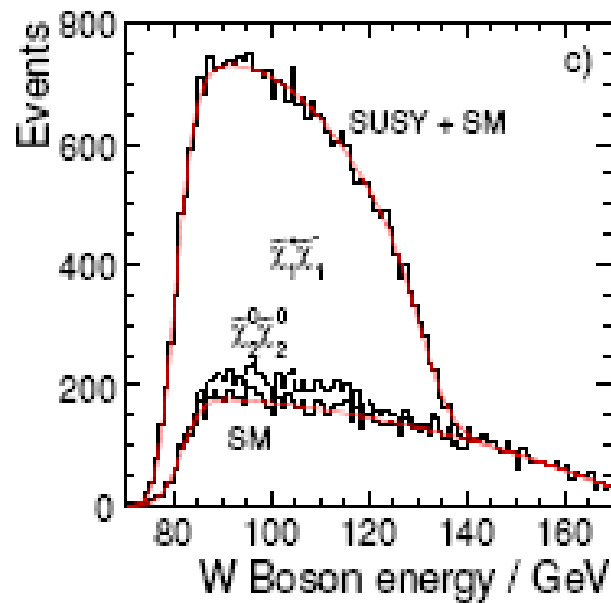

This was only a very limited selection of topics:

See e.g. the reference design report for the ILC (www.linearcollider.org)

Or the letter of intent of the ILD detector (www.ilcild.org)
for much more detail.

How do we realise such a machine?

High Energy Lepton Collider

	LEP-II	Super- LEP	HYPER- LEP
E_{cm}	180 GeV	500 GeV	2 TeV
L	27 km	200 km	3200 km
ΔE	1.5 GeV	12 GeV	240 GeV
€_{tot}	2 billion	15 billion	240 billion!

Table by James Jones

High Energy Lepton Collider

	LEP-II	Super-LEP	HYPER-LEP
E_{cm}	180 GeV	500 GeV	2 TeV
L	27 km	200 km	3200 km
ΔE	1.5 GeV	12 GeV	240 GeV
ϵ_{tot}	2 billion	15 billion	240 billion!

Table by James Jones

- The next e^+e^- collider will be linear:
- $\epsilon_{LC} \sim E$

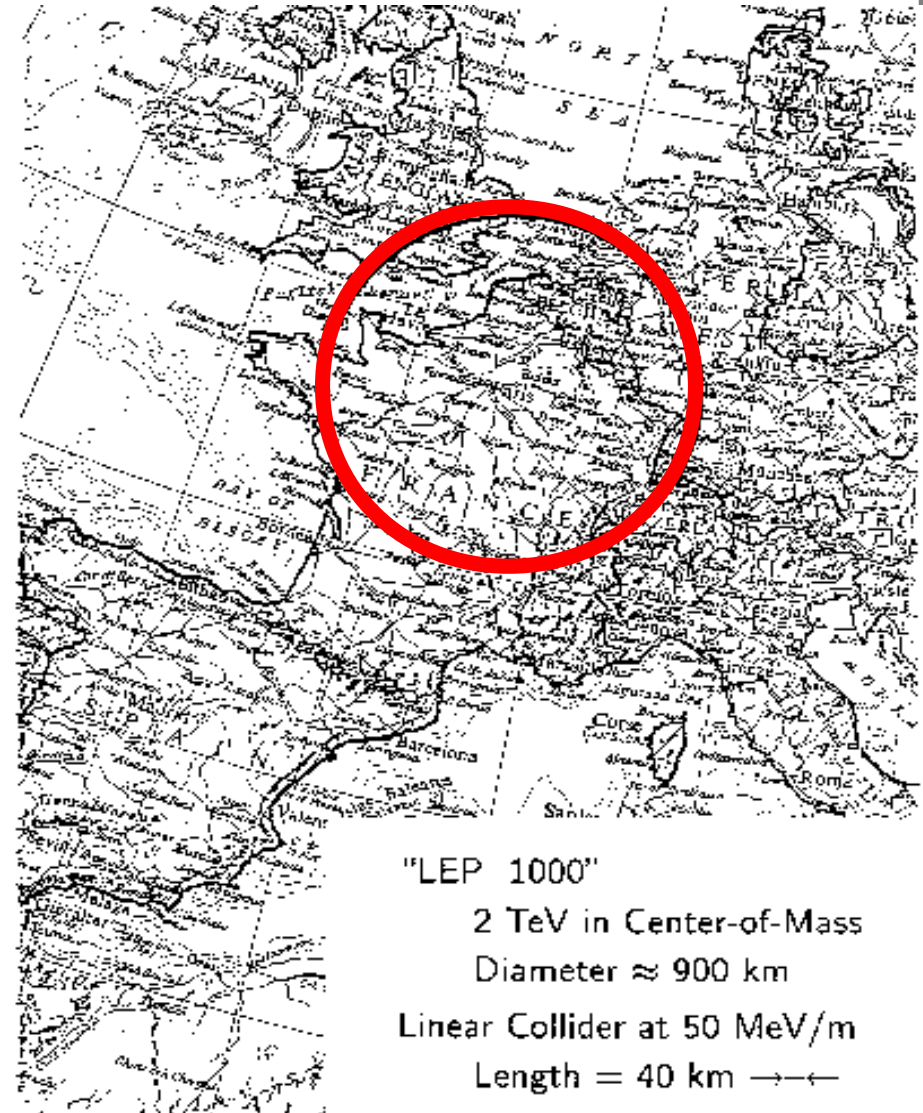


Figure by Gregory Loew

Luminosity Wish

Luminosity - energy

as much as possible of course...

example: SM Higgs production

$\sigma \approx 20 \text{ fb}$

$O(1\%)$ measurement needs


$O(10000)$ events:

need approx. 500 /fb

assume 5 years running,

< 500 days in 5 years

$$L \approx 1 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$$

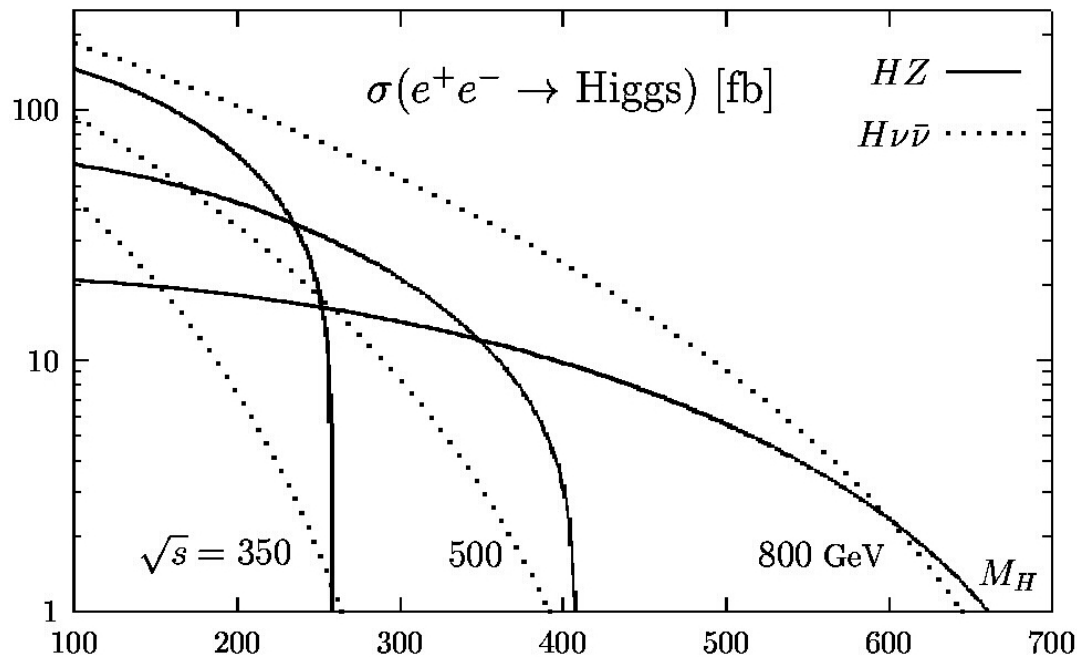

The Luminosity Issue

Collider luminosity ($\text{cm}^2 \text{s}^{-1}$) is approximately given by:

$$L = \frac{n_b N^2 f_{rep}}{A} H_D$$

where:

n_b = bunches / train

N = particles per bunch

f_{rep} = repetition frequency

A = beam cross-section at IP

H_D = beam-beam enhancement factor

For *Gaussian* beam distribution:

$$L = \frac{n_b N^2 f_{rep}}{4 \pi \sigma_x \sigma_y} H_D$$

Taking power into account:

$$L = \frac{\eta_{RF \rightarrow beam} P_{RF} N^2}{4 \pi \sigma_x \sigma_y E_{CM}} H_D$$

Luminosity Issues: storage ring vs LC

LEP $f_{rep} = 44 \text{ kHz}$

LC $f_{rep} = \text{few-100 Hz}$
(power limited)

factor ~400 in L already lost!

$$L = \frac{n_b N^2 f_{rep}}{4 \pi \sigma_x \sigma_y} H_D$$

Must push very hard on beam cross-section at collision:

LEP: $\sigma_x \sigma_y \approx 130 \times 6 \mu\text{m}^2$

LC: $\sigma_x \sigma_y \approx (200-500) \times (3-5) \text{ nm}^2$

factor of 10^6 gain!

Needed to obtain high luminosity of a few $10^{34} \text{ cm}^{-2}\text{s}^{-1}$


Single pass machine (LC): can afford to push beam size
problem: beams destroy themselves

Beamstrahlung

Energy loss from BS: δ_{BS}
typical numbers: 3-10%

$$\delta_{BS} \approx 0.86 \frac{e r_e^3}{\sigma_z} \left(\frac{E_{cm}}{\sigma_z} \right) \frac{N^2}{(\sigma_x + \sigma_y)^2}$$

(without derivation)

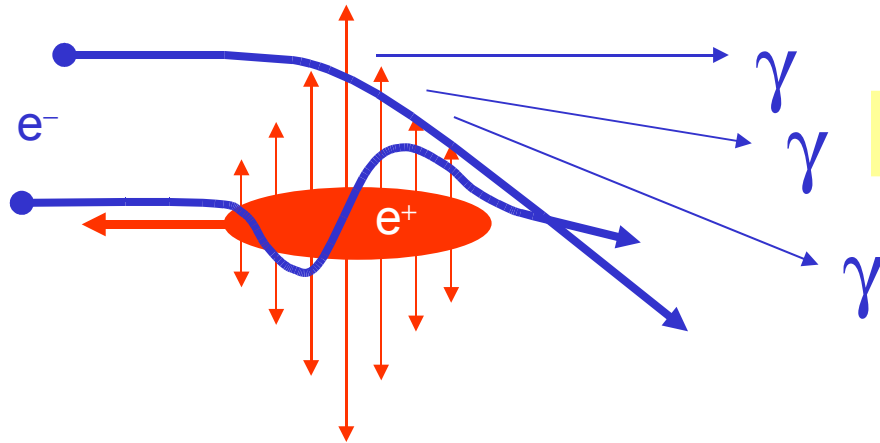


Luminosity:

$$L = \frac{\eta_{RF} P_{RF} N^2}{4\pi \sigma_x \sigma_y E_{cm}} H_D$$


LARGE luminosity: make beams **SMALL**
SMALL beamstrahlung: make beams **LARGE**

optimum is flat beams

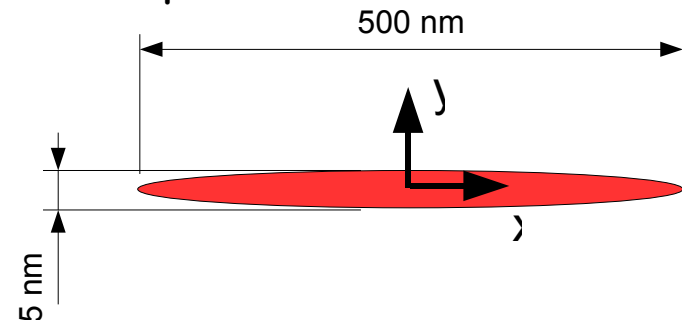


Beam Beam Interactions

Simulation of two LC bunches as they meet each other

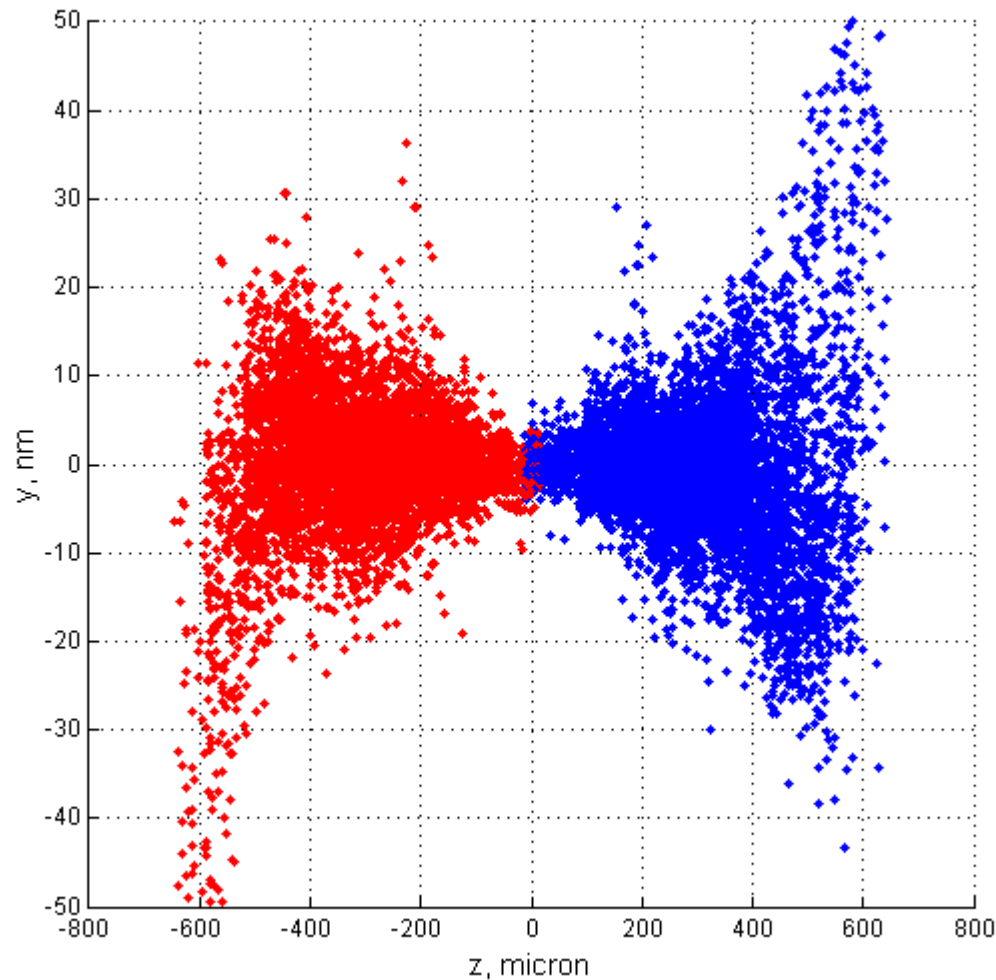


International Linear Collider

- superconducting acceleration
- 31.5 MeV/m, 1.3 GHz
- advanced design (c.f. XFEL)
- 500 GeV (\rightarrow 1TeV)
- Luminosity: $2 \times 10^{34} \text{ cm}^{-2} \text{ s}^{-1}$
- technology is at hand


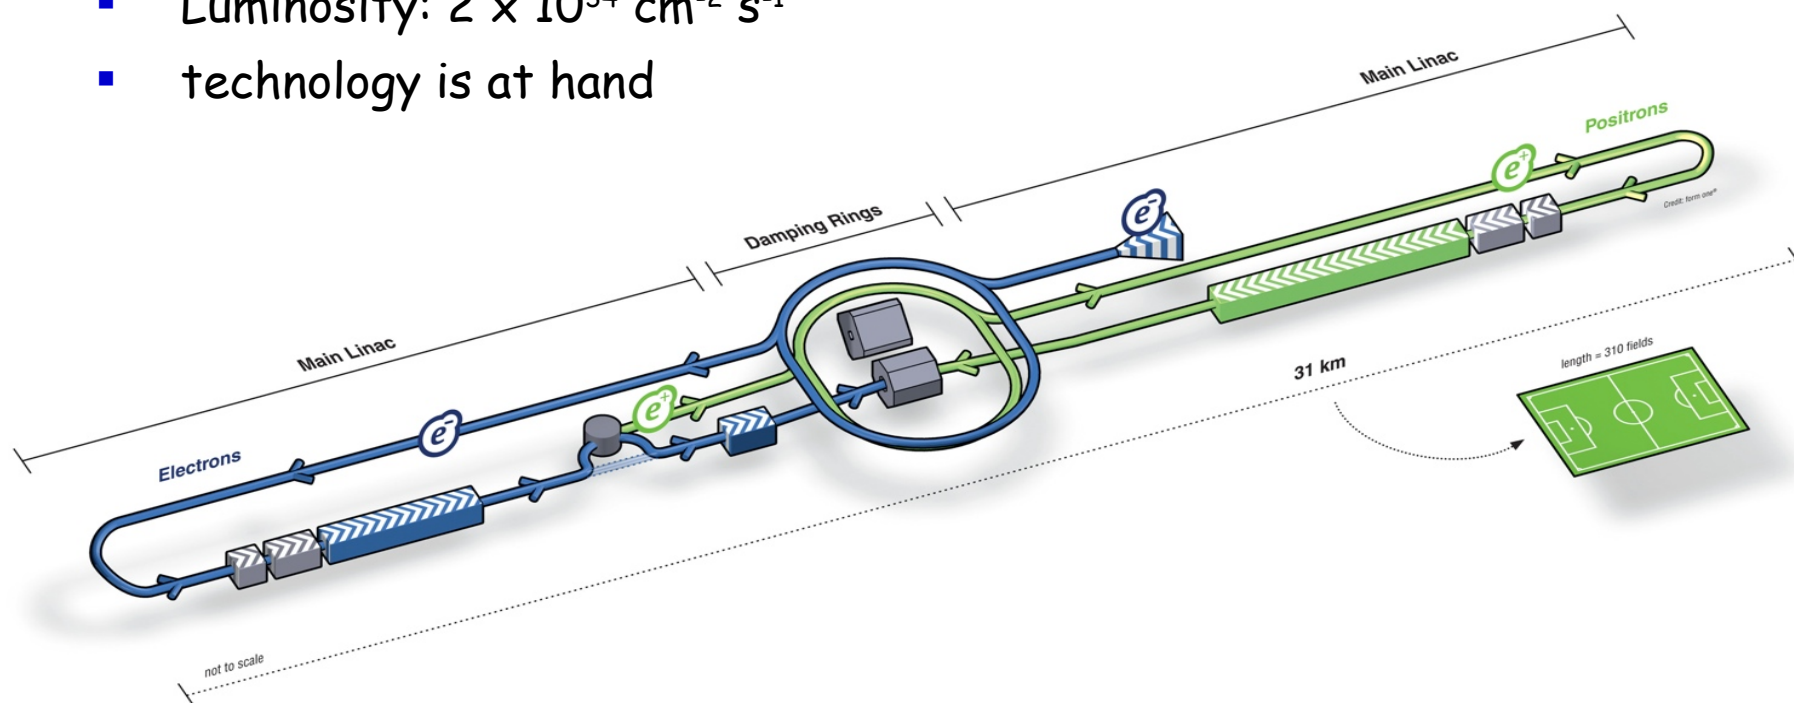


Global Design Effort

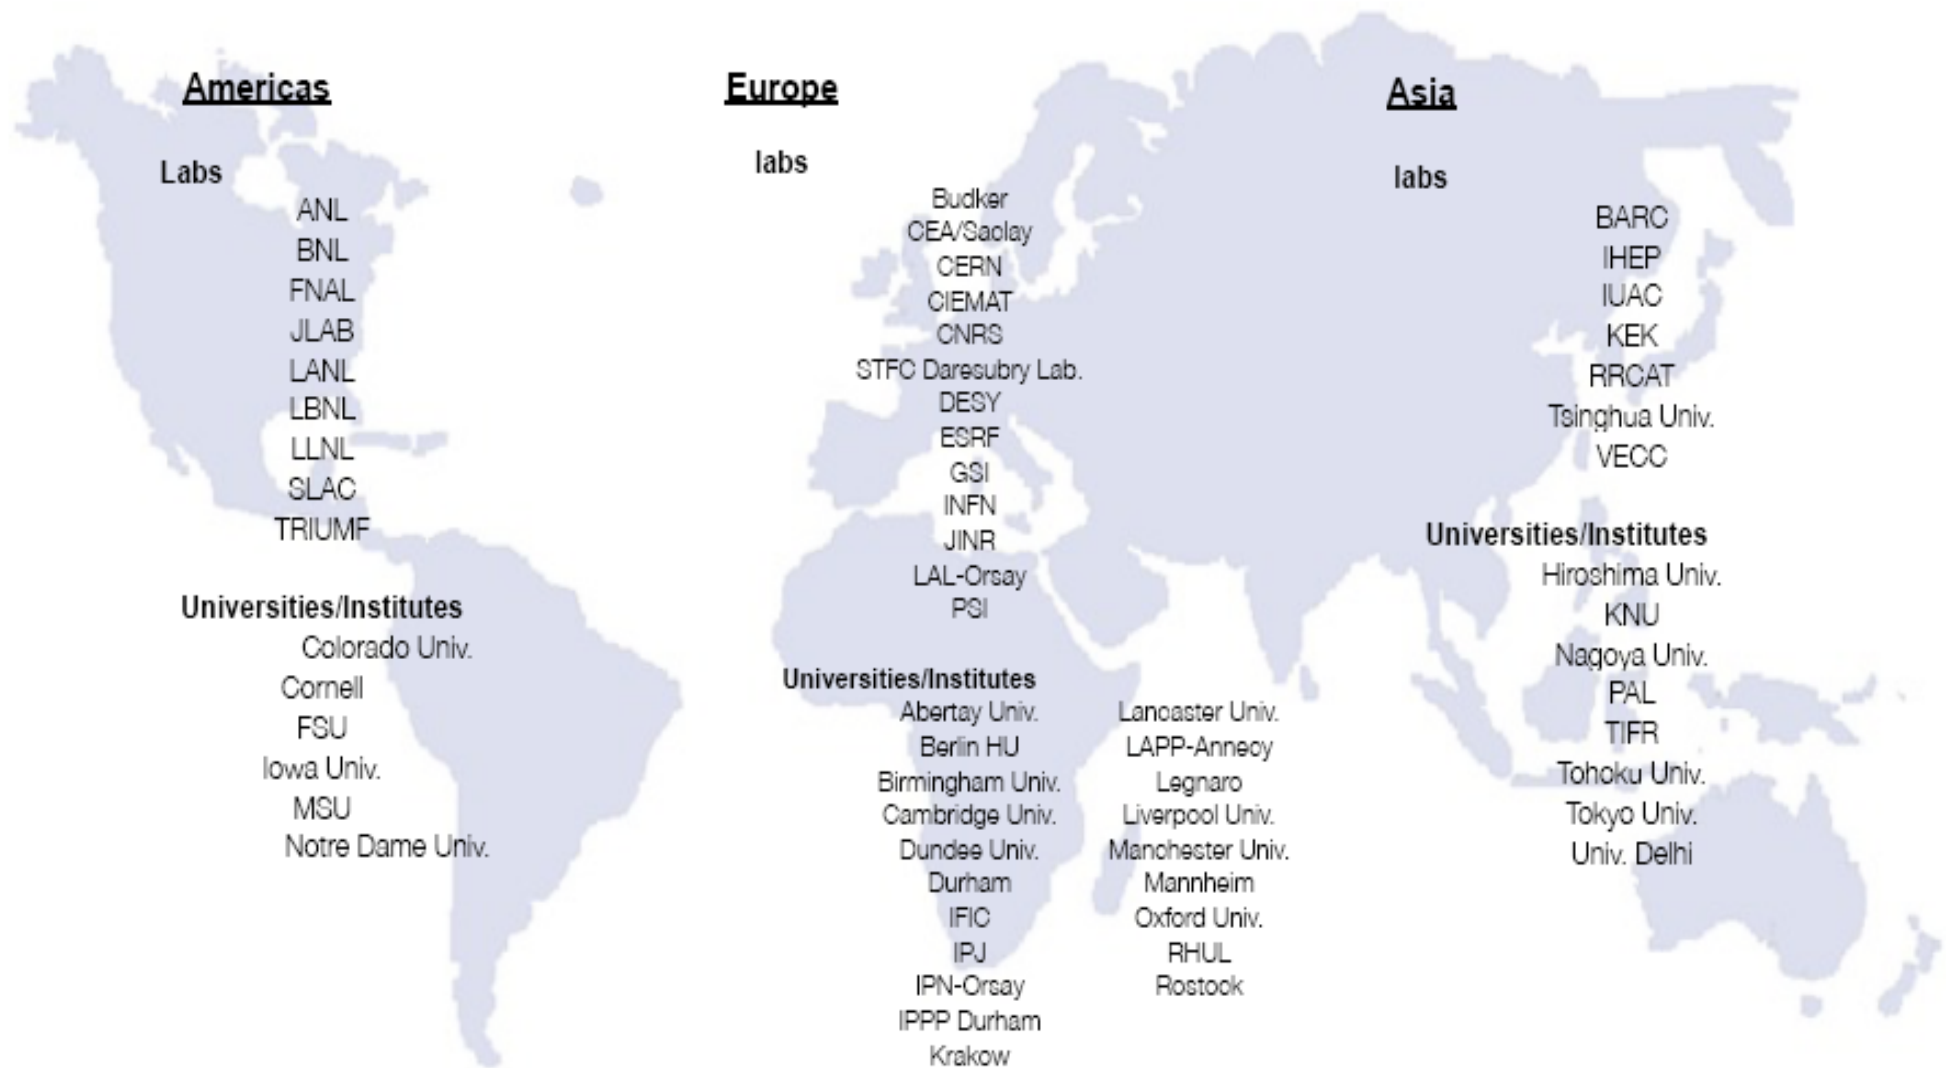

LC technologies


At the core of the matter: cavities, acceleration power

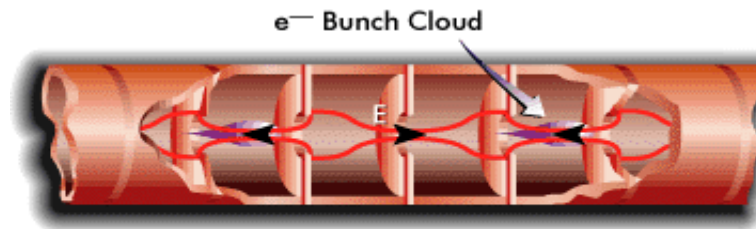

Typical scale: RF


Warm machine (NLC, CLIC)

$\nu \approx \text{tens of GHz} \Rightarrow \lambda = O(1)\text{cm}$

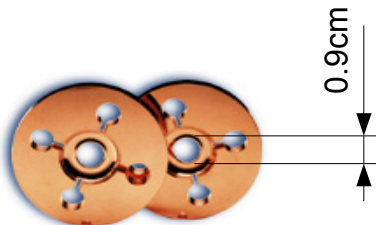

Cold Machine (ILC):



$\nu \approx O(1)\text{GHz} \Rightarrow \lambda = O(10)\text{cm}$

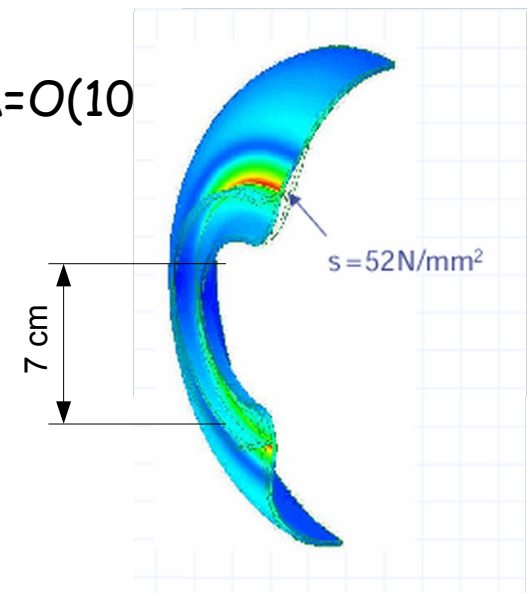

ILC Cavities


Acceleration gradient goal:

- 35 MV/m in 9-cell cavities with production yield >80%
- 50 MV/m have been reached with single cavities
- Mass production reliability is the key problem
- ILC goal: 32.5 MV/m

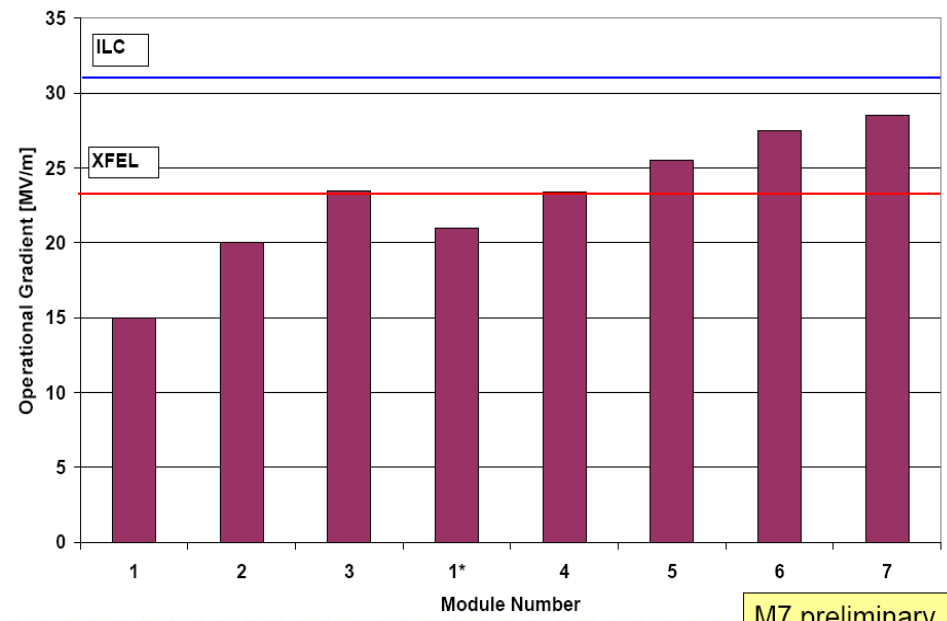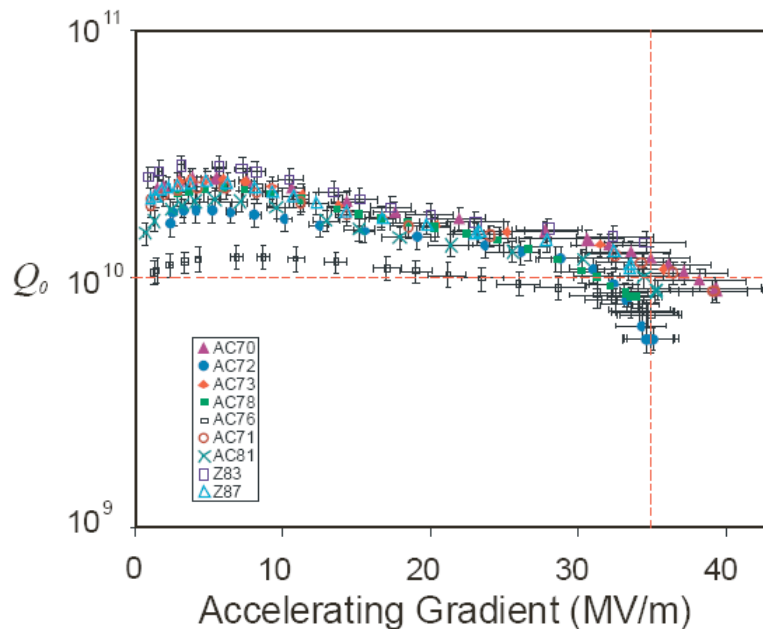


Cavity Quality (Q value)

- Superconducting cavity: $Q > 10^{10}$
- A church bell (300 Hz) with $Q = 5 \times 10^{10}$ would ring - once excited - longer than one year!

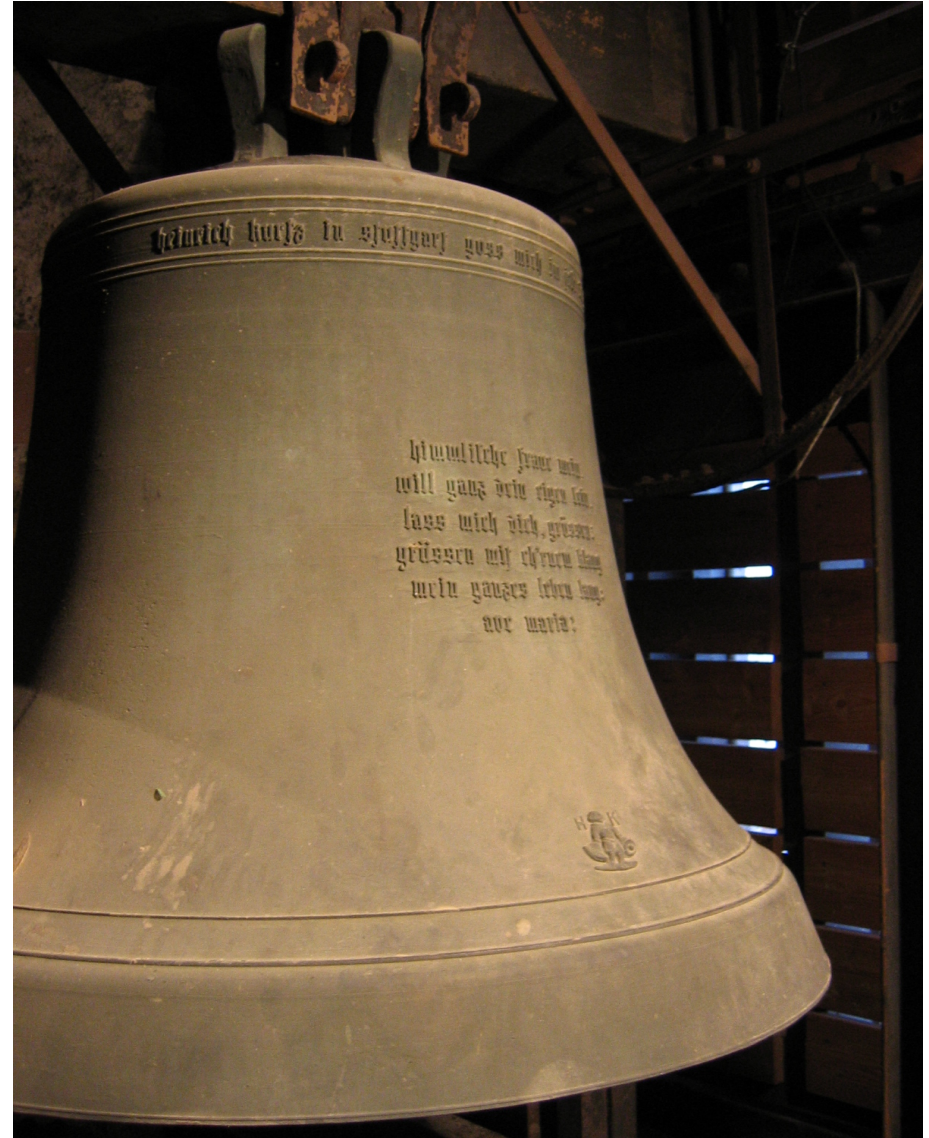

Cavity treatment

- Electropolishing as major advance in surface preparation

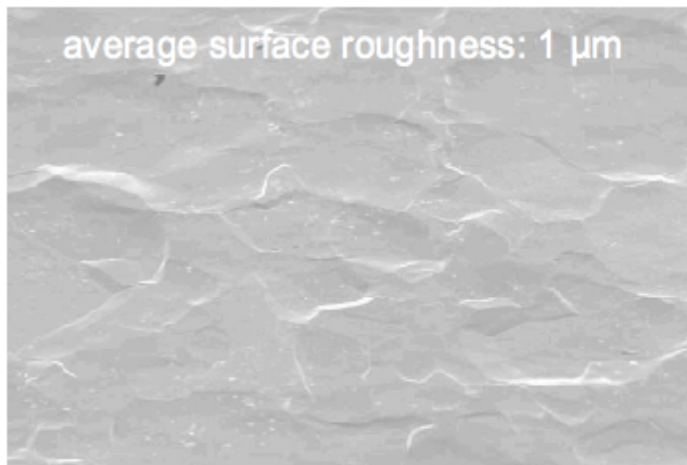


buffered chemical polishing




electrolytic polishing

- Industrialisation is the key issue
- Large Synergy with the European XFEL project

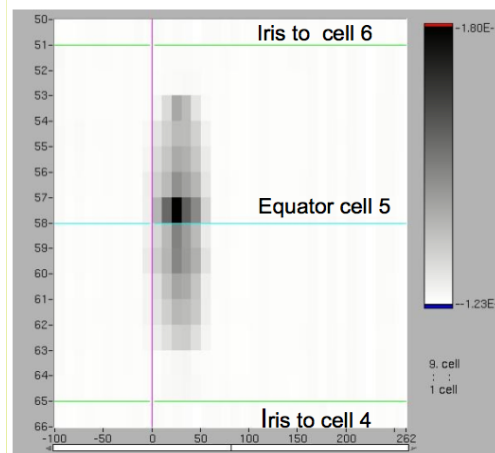

Z130: Quench in $3\pi/9$ -mode at 22 MV/m
Linear Colliders

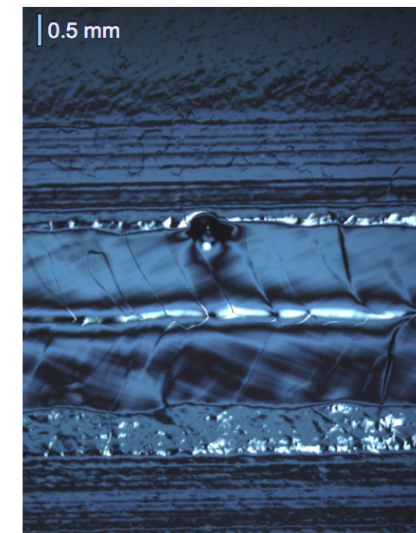

Picture at same location

Accelerator Systems ILC

ILC is a very demanding machine

From source over damping ring to final focus: technical advances are needed

Work is proceeding on all areas within the GDE, coordinated world wide

Major large scale test facilities:

FLASH / TTF at DESY


ATF2 at KEK

Cornell damping ring test


Goal: reliable technical design by 2012, backed up by well understood costing

Accelerator Systems ILC

ILC is a very demanding machine

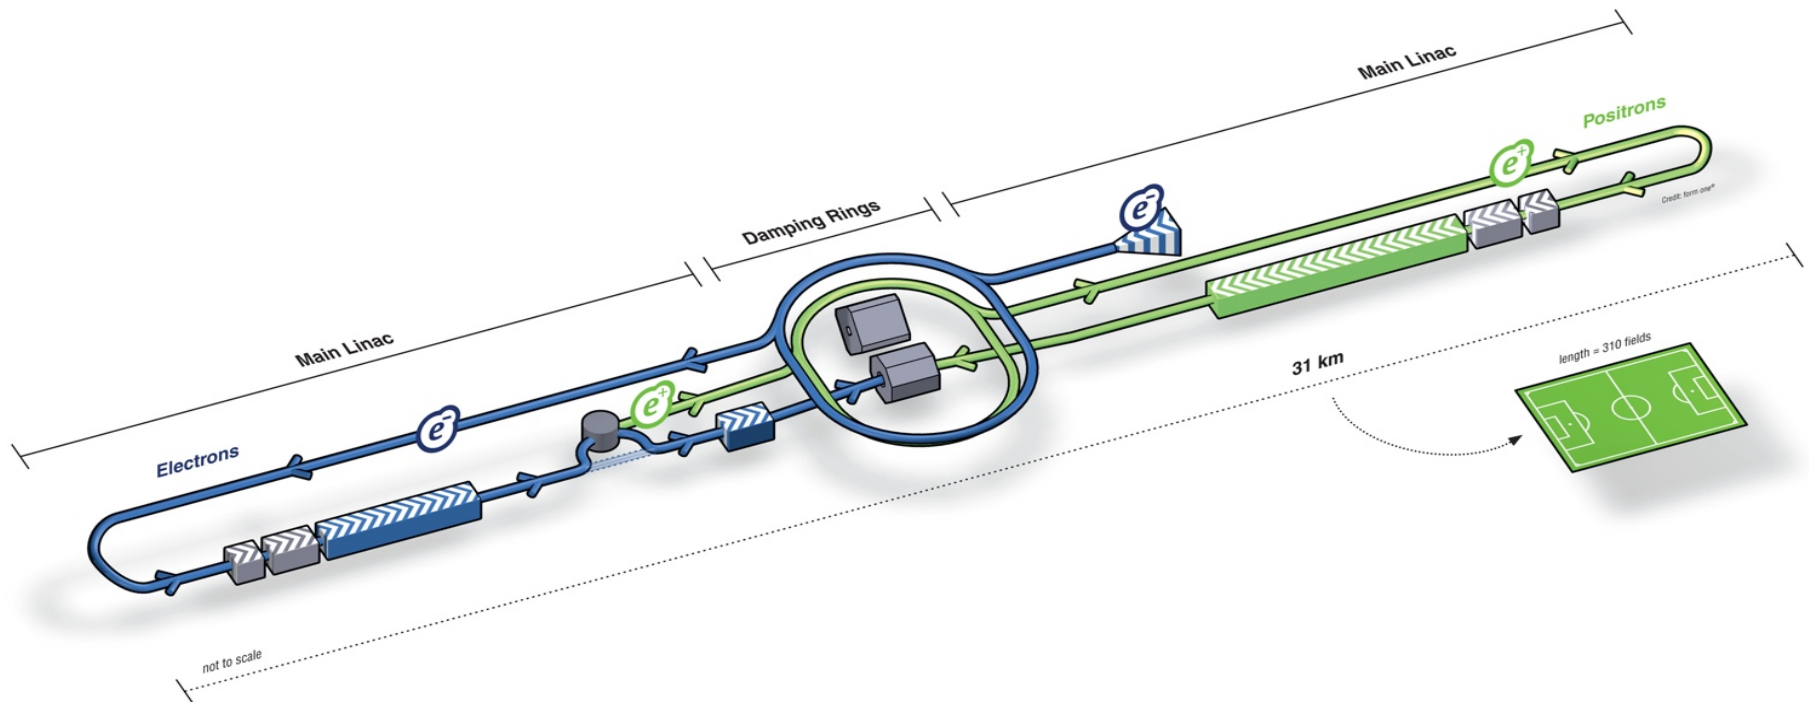

Time Lines

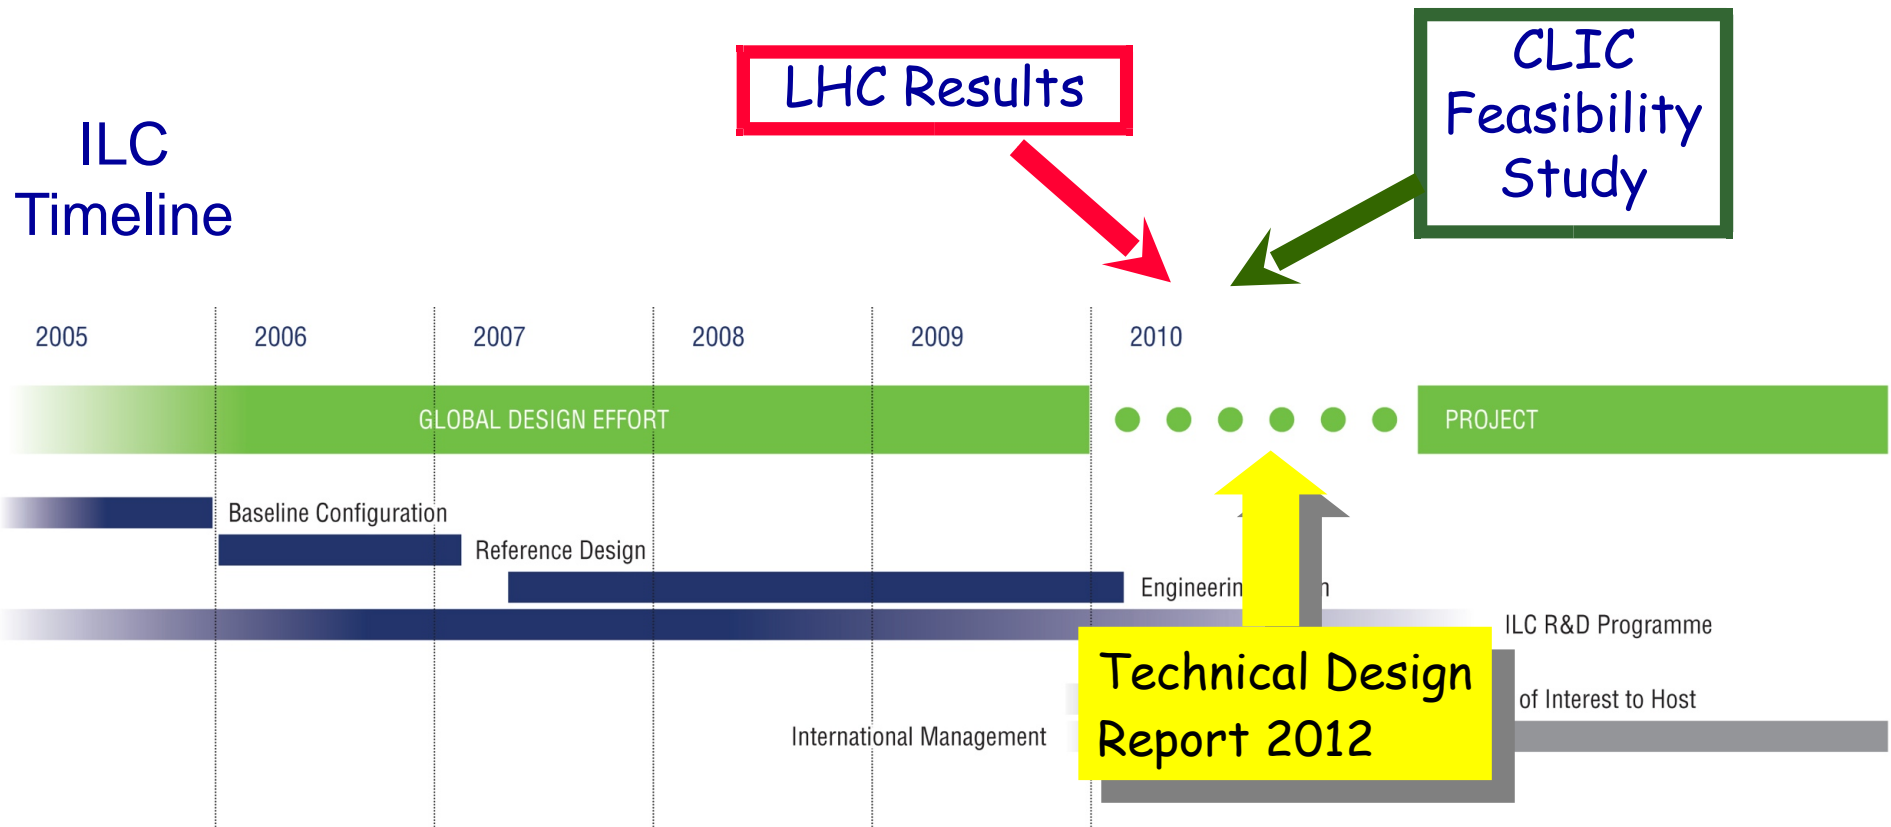

A Detector for the ILC

Several detector concepts are being developed:

Two have reached a certain maturity:

ILD (International Large Detector)

SiD (Silicon Detector)

Both have been recently
evaluated by an international
expert group

Other approaches are being discussed

In the following I will mostly discuss ILD

But conceptual differences are small (technological ones are big...)

A Detector at the ILC

Excellent vertexing
as close as possible to the IP

Robust, three dimensional tracking
high efficiency, do not forget the low
energy tracks

Powerful calorimeter
good photon identification

hermeticity

Detector Requirements

Excellent vertexing
as close as possible to the IP

Robust, three dimensional
high efficiency, do not forget
energy tracks

Jet Reconstruction:
Energy, Direction
Particle Flow

Powerful calorimeter
photon identification


hermeticity

Tracking Layout

Powerful tracking / vertexing system

excellent vertexing capability
high precision tracking

Proposed layout
of the ILD
central tracking
system

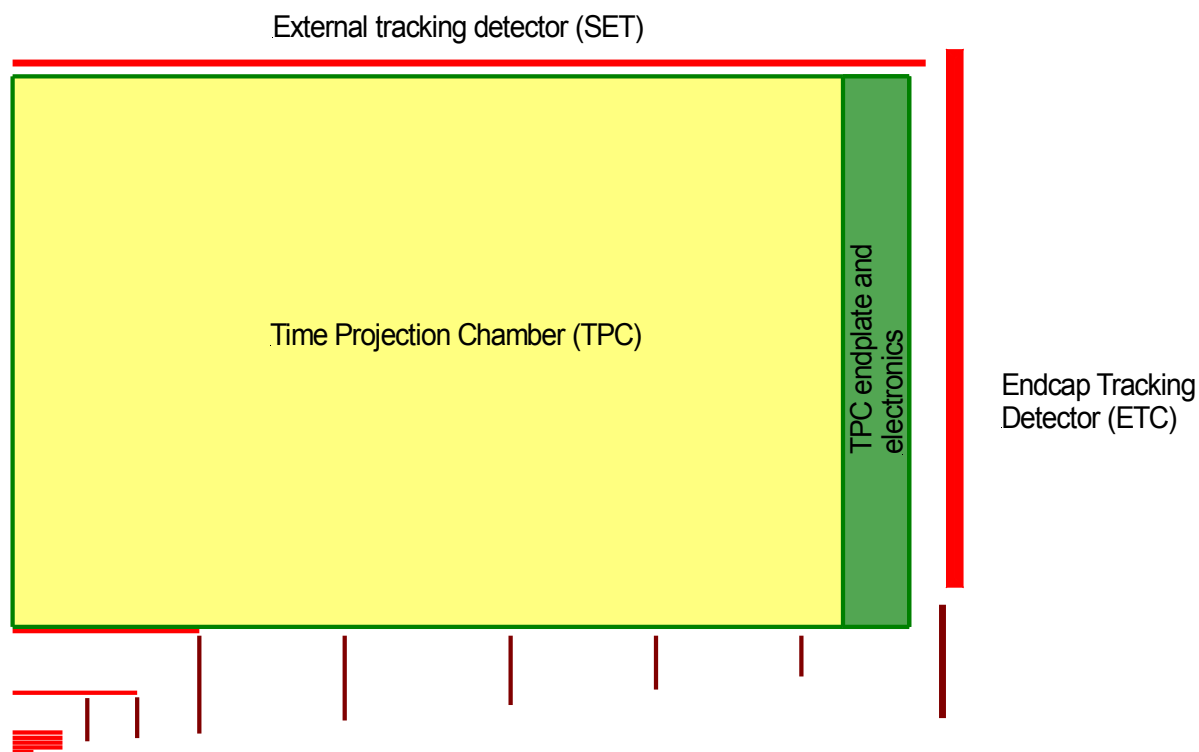

Special Focus on:

Robustness/
Redundancy


Excellent precision

Tracking Layout

Powerful tracking / vertexing system

excellent vertexing capability
high precision tracking

Proposed layout
of the ILD
central tracking
system

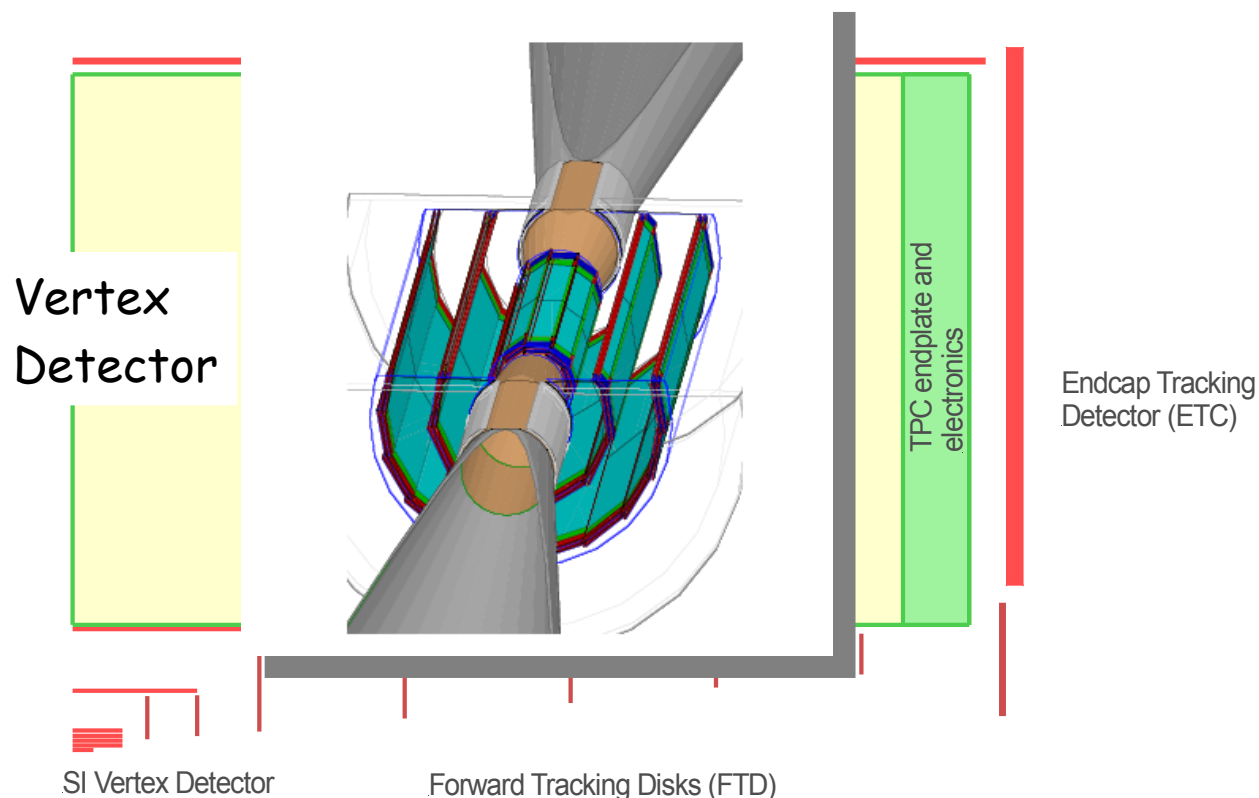

Endcap Tracking
Detector (ETC)

Special Focus on:

Robustness/
Redundancy


Excellent precision

Tracking Layout

Powerful tracking / vertexing system

excellent vertexing capability
high precision tracking

Proposed layout
of the ILD
central tracking
system

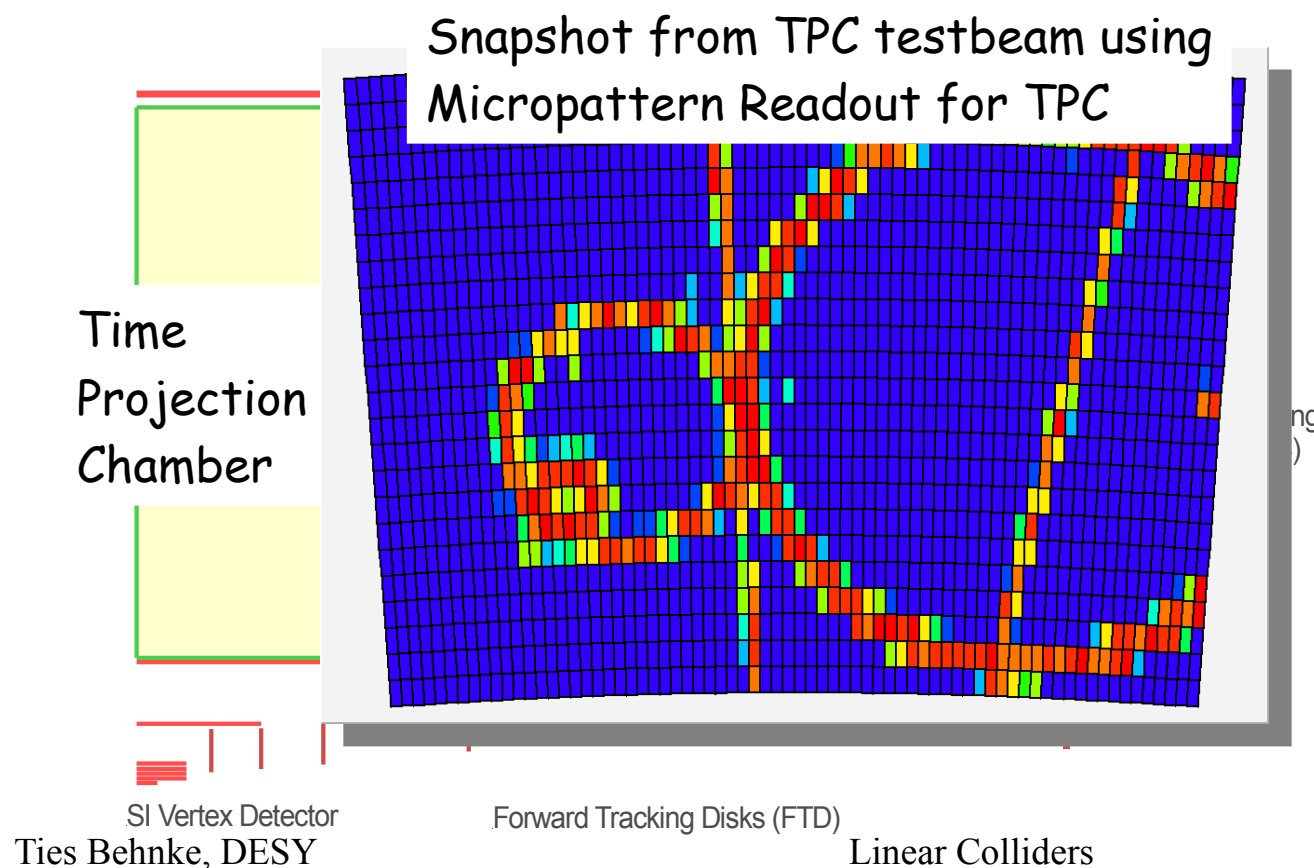

Special Focus on:

Robustness/
Redundancy

Excellent precision

Tracking Layout

Powerful tracking / vertexing system

excellent vertexing capability
high precision tracking


Proposed layout
of the ILD
central tracking
system

Special Focus on:

Robustness/
Redundancy

Excellent precision

Radiation hardness
is not an issue!

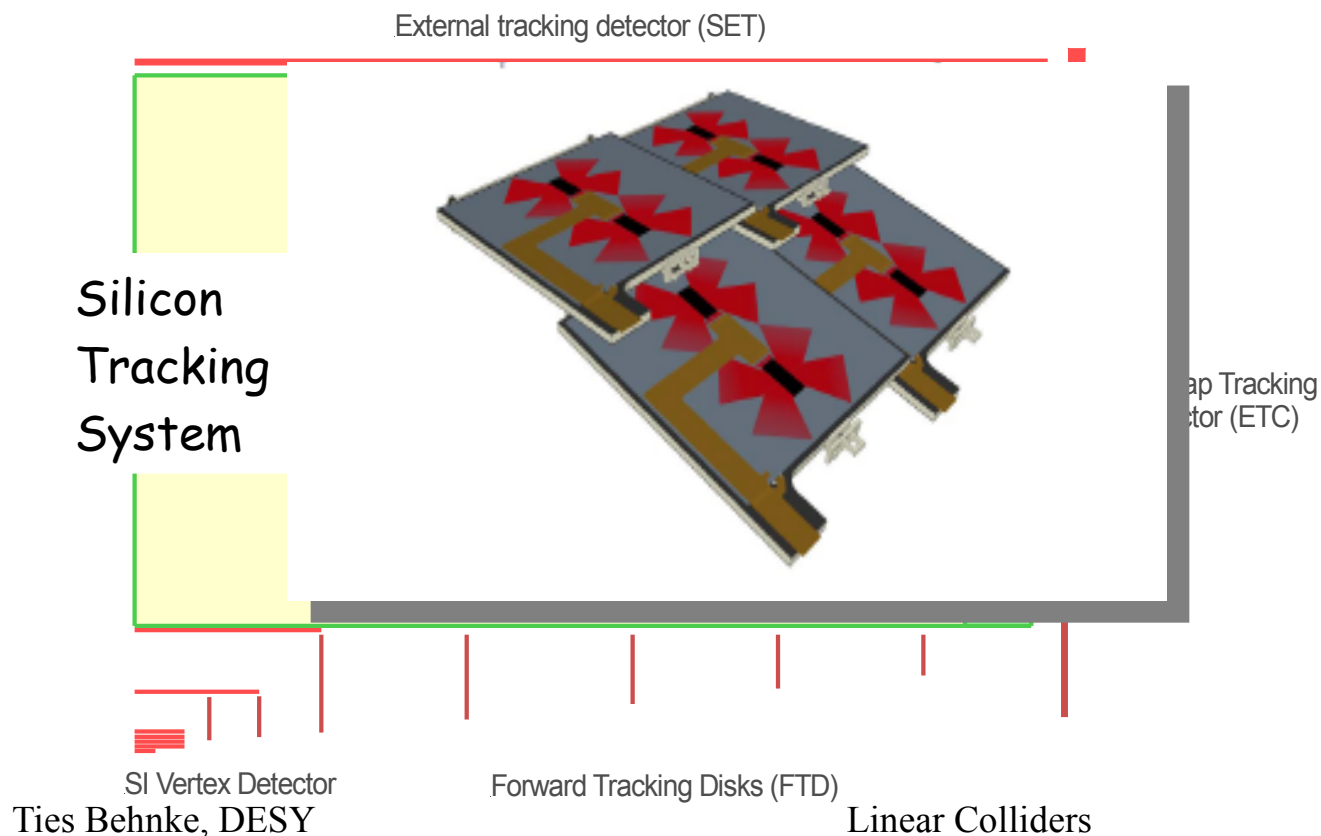

Material in the Tracker


Reduction of material is key goal
of R&D in the next few years

Goal: very light tracking system:

total material before calorimeter < 10% X_0 in the barrel
<30% (or less) in the endcap

including all services, all support structures, cables, etc.

Realistic (but optimistic) estimates make this believable...



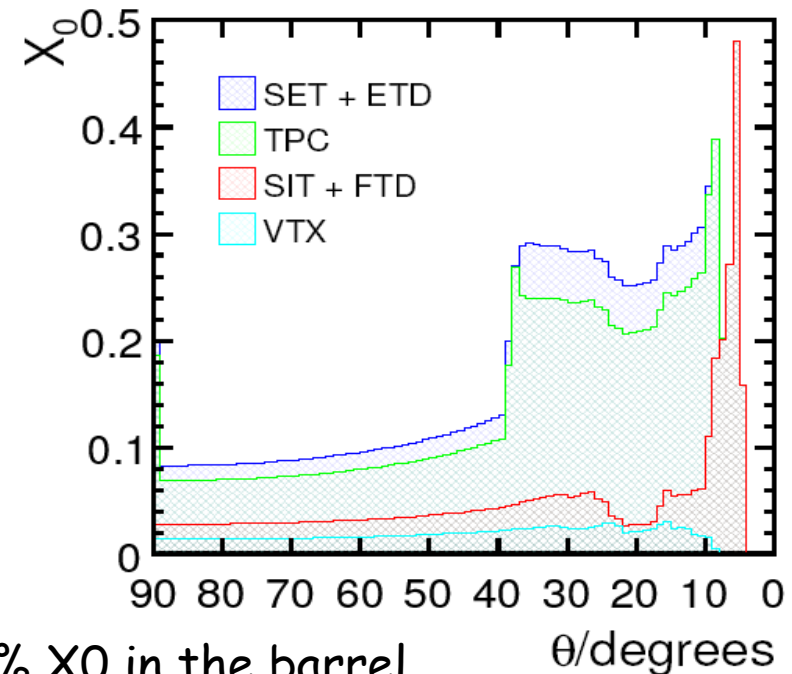


Materials: from Concept to Reality

Major difference / advance to LHC detectors is needed:


... and the reality 10 years later

The detector TDR 1996

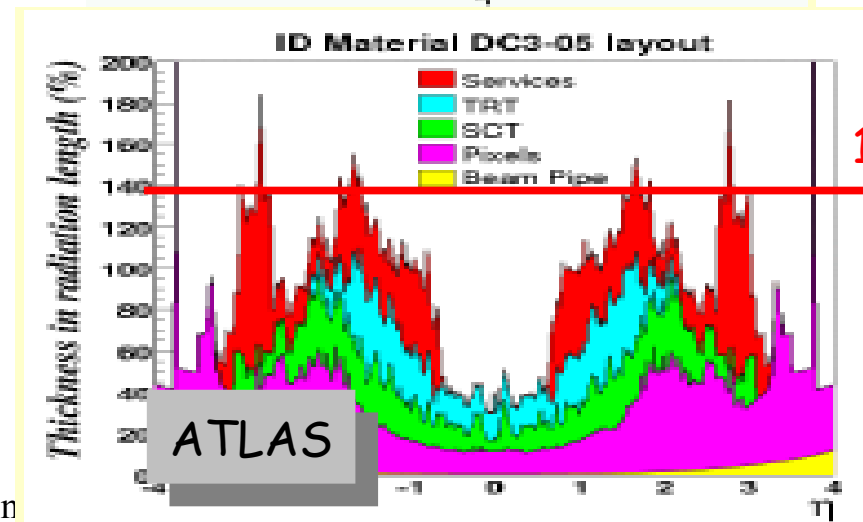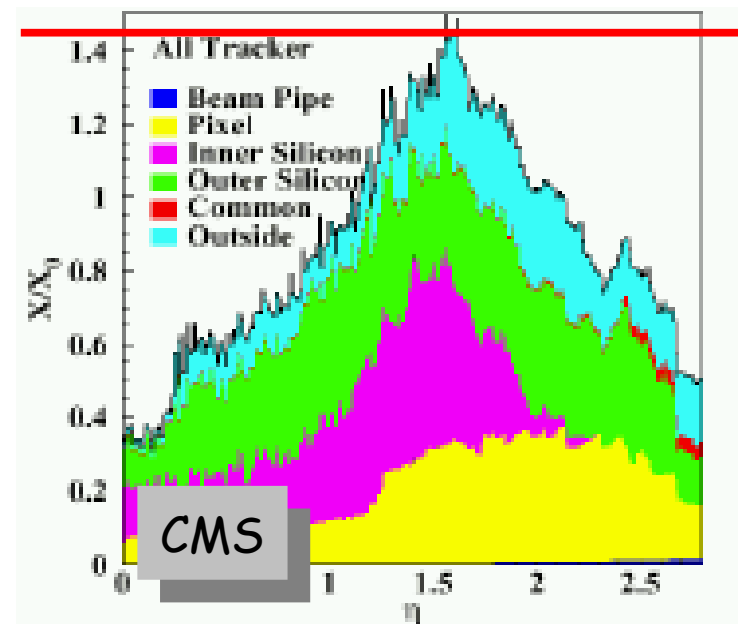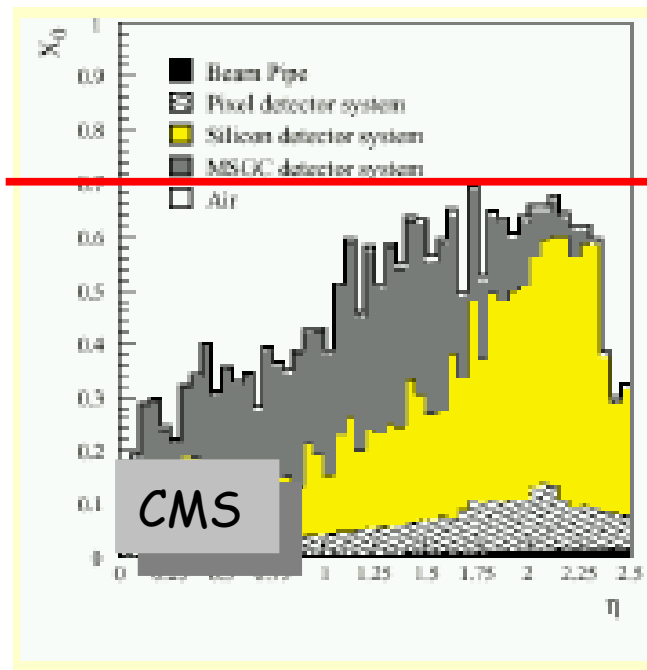


The ILC Goal

Major difference / advance to LHC detectors ... and the reality 10 years later

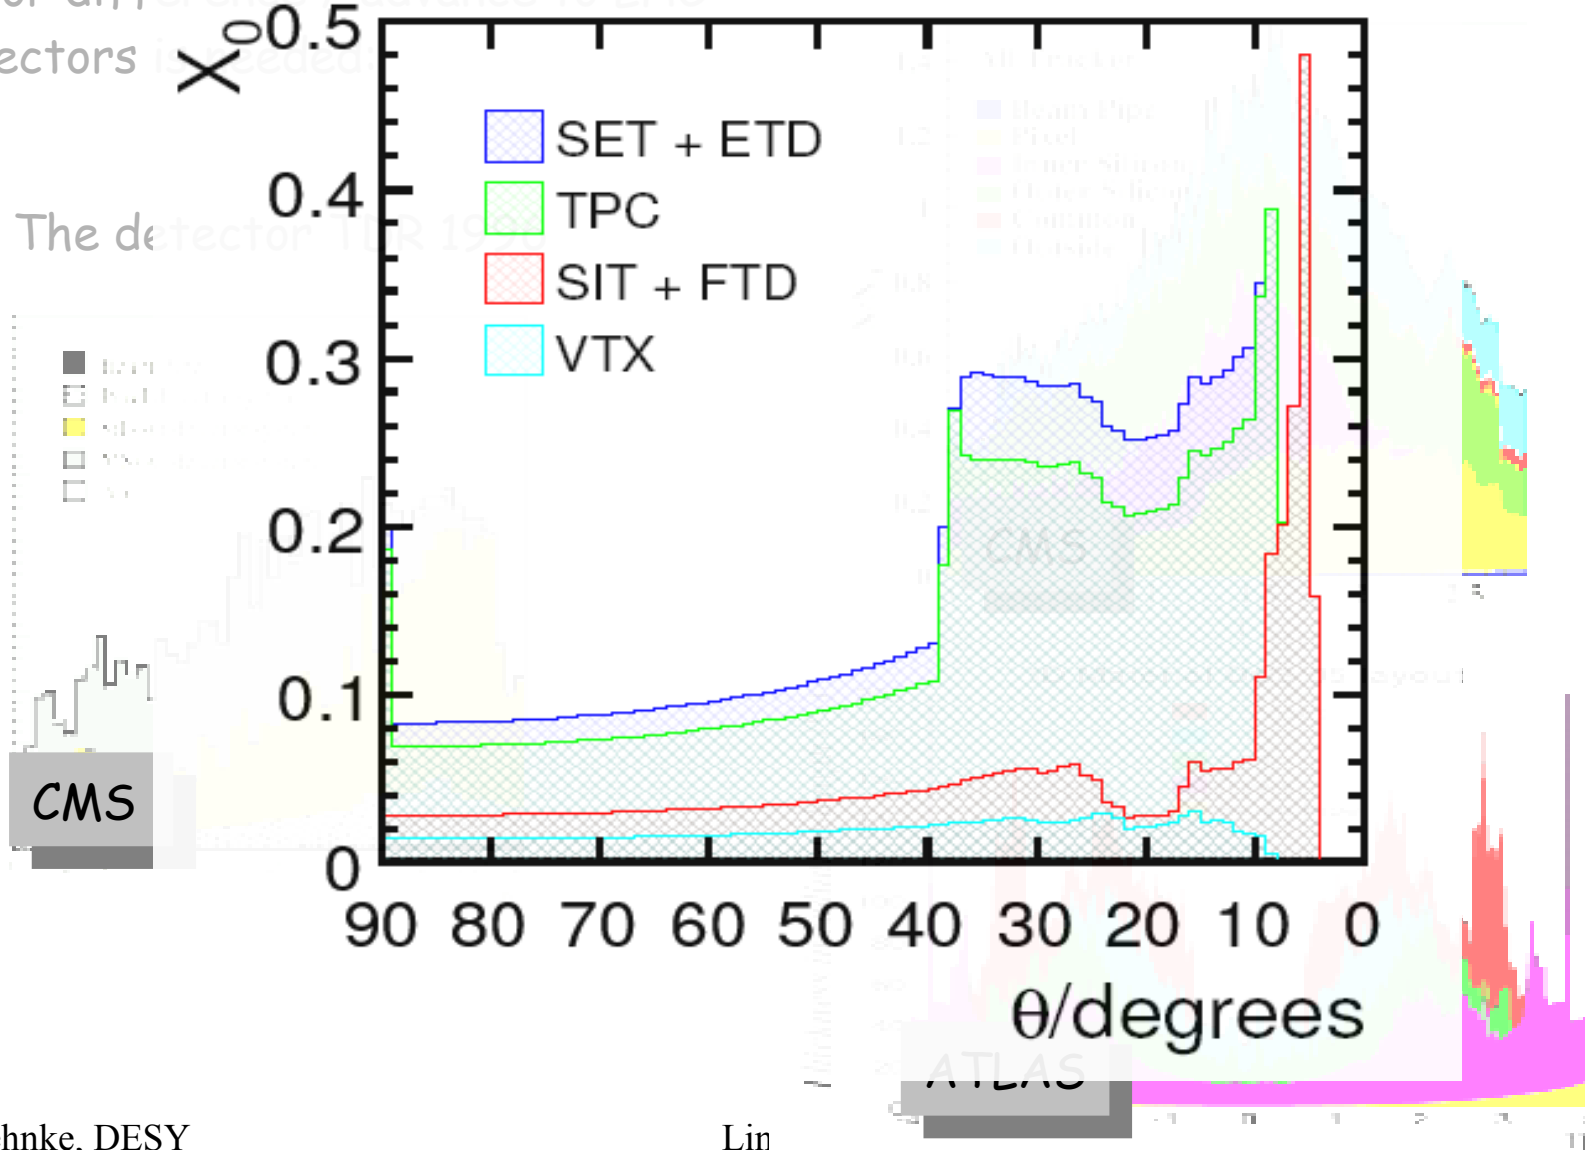

Particle Flow

- Most precise event reconstruction (measured e.g. in the jet mass)
- Individual particles are reconstructed: charged and neutrals

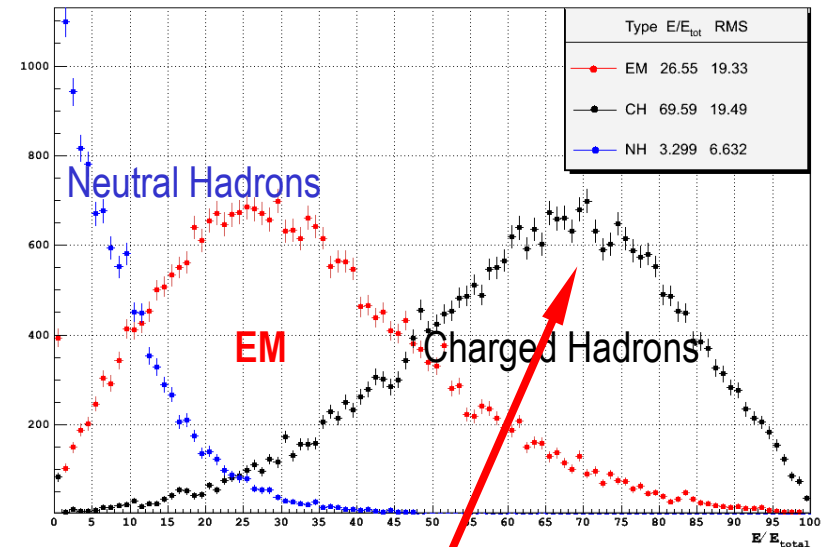

Fundamental problem: fluctuations in the calorimeter:


$\langle 70\% \rangle$

use tracker as much as possible
 replace information in calorimeter by tracker information
 only use calorimeter for neutral particles (photons, neutral hadrons)

Pushes requirements for calorimeter:
 excellent segmentation
 energy resolution is of lesser importance

$30\%/\sqrt{E}$ (below 100 GeV)
 is the goal

What is Particle Flow

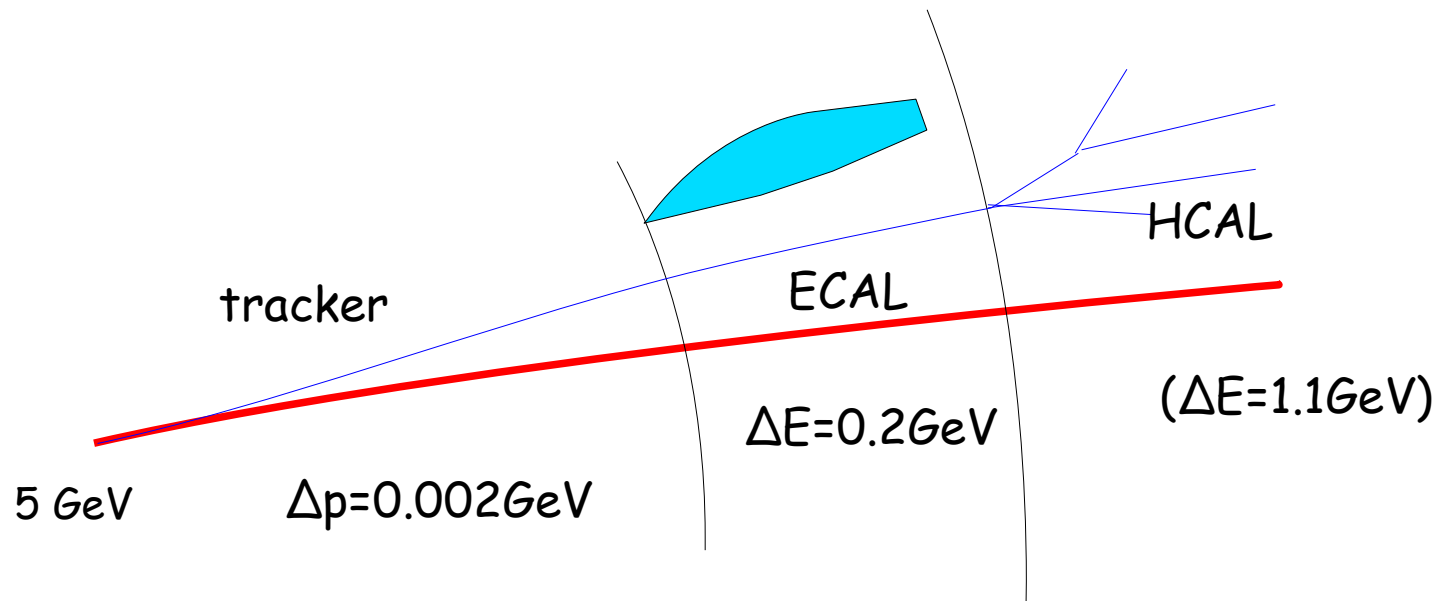


5 GeV electron: 0.002 GeV
 photon: 0.2 GeV
 neutron: 1.1 GeV


For LC energies: tracker is most precise

Utilize the precise tracker as much as possible

Resolution tracker - Calorimeter

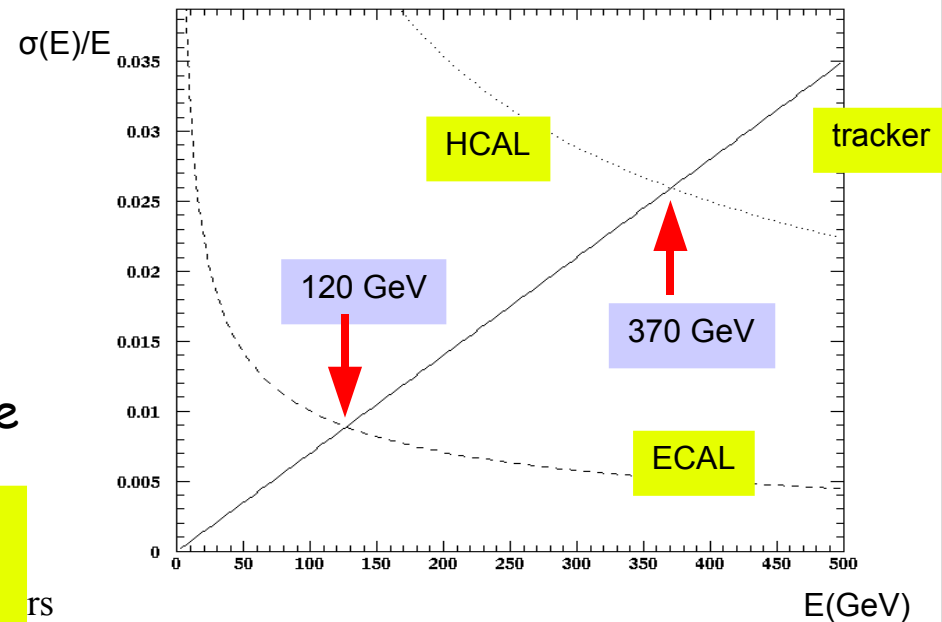

What is Particle Flow

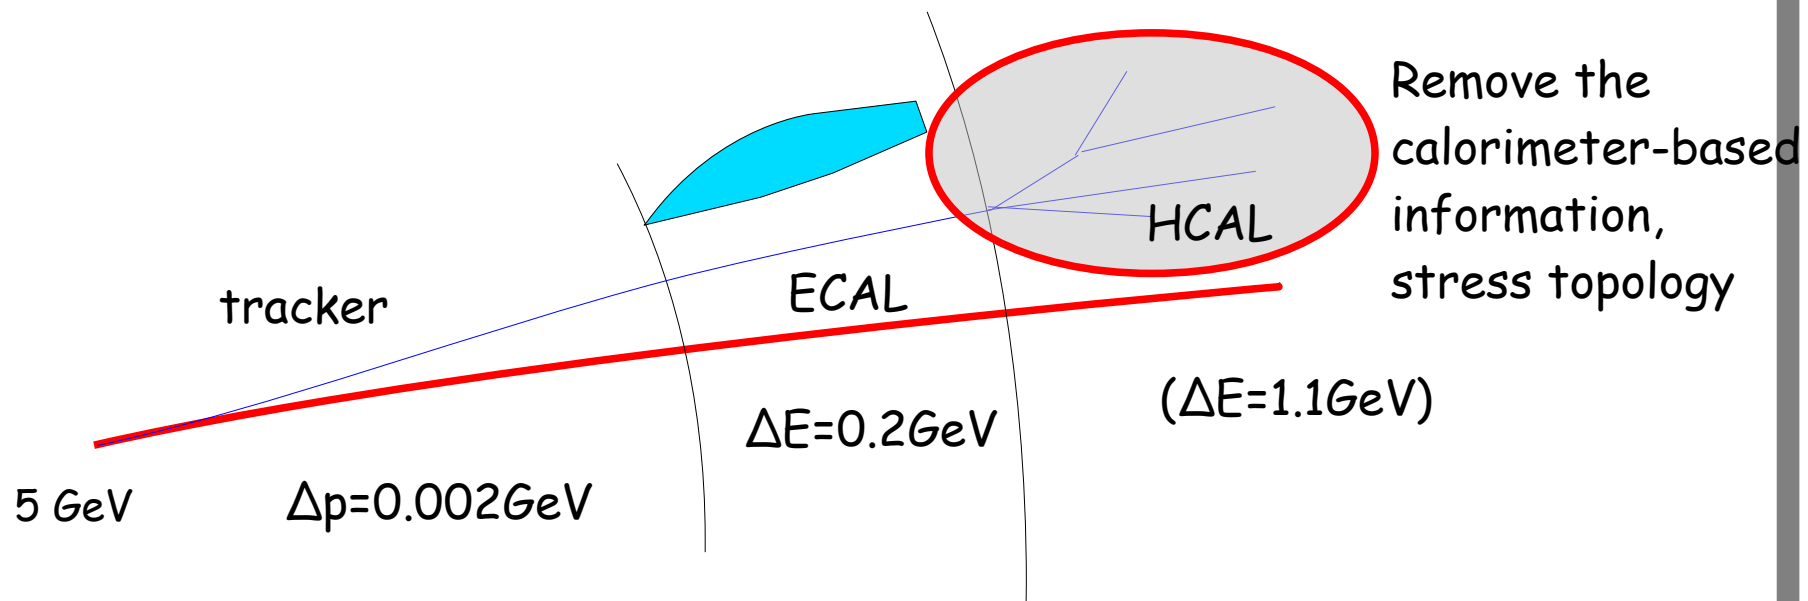


5 GeV electron: 0.002 GeV
 photon: 0.2 GeV
 neutron: 1.1 GeV


For LC energies: tracker is most precise

Utilize the precise tracker as much as possible


Resolution tracker - Calorimeter

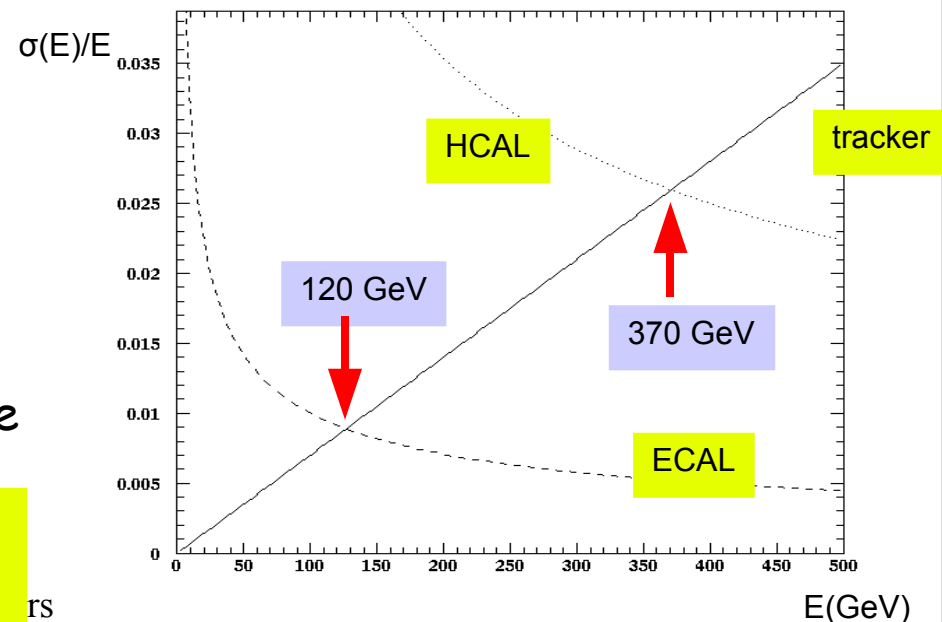

Particle Flow

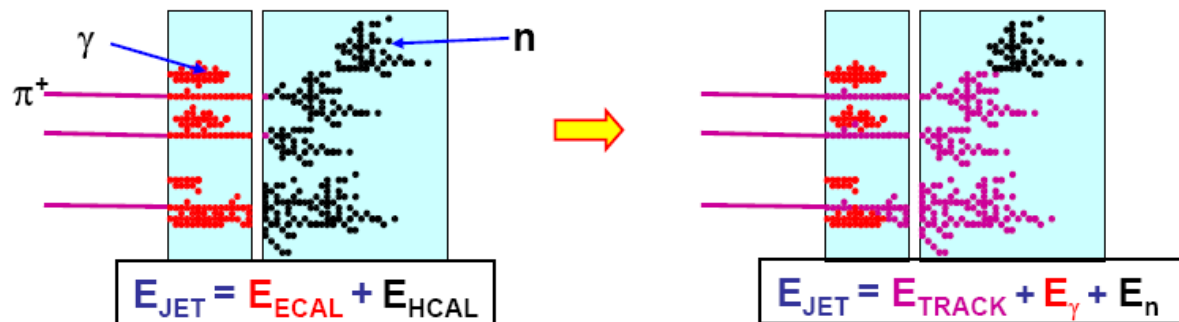

Utilise tracker and calorimeter information

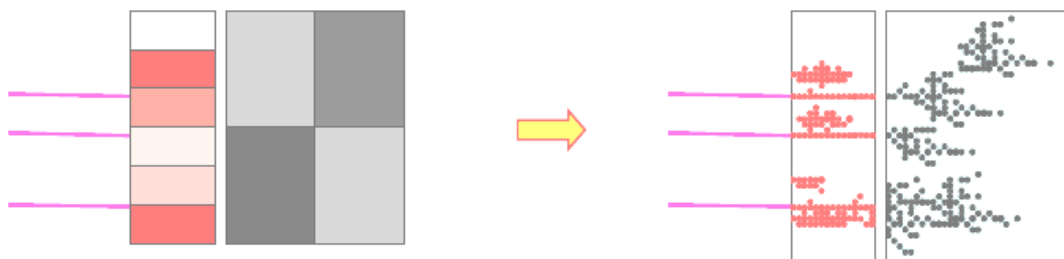


Spatial Resolution in Calo is essential



Software to exploit the granularity is very important

Pictures by M. Thompson, Cambridge


Particle Flow

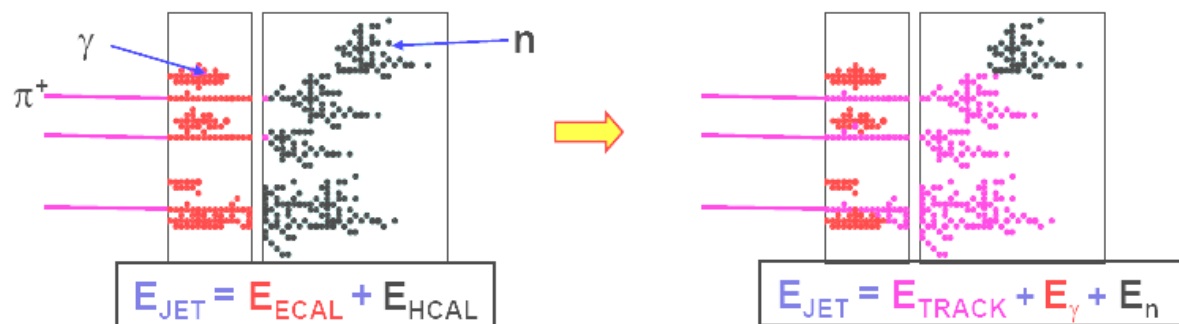

Utilise tracker and calorimeter information




Spatial Resolution in Calo is essential

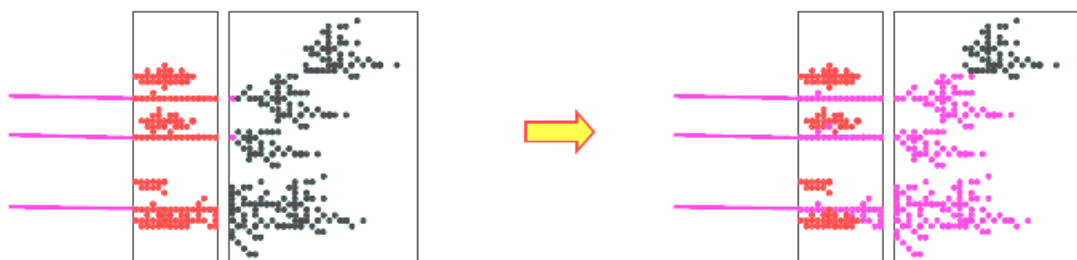


Software to exploit the granularity is very important

Pictures by M. Thompson, Cambridge


Particle Flow

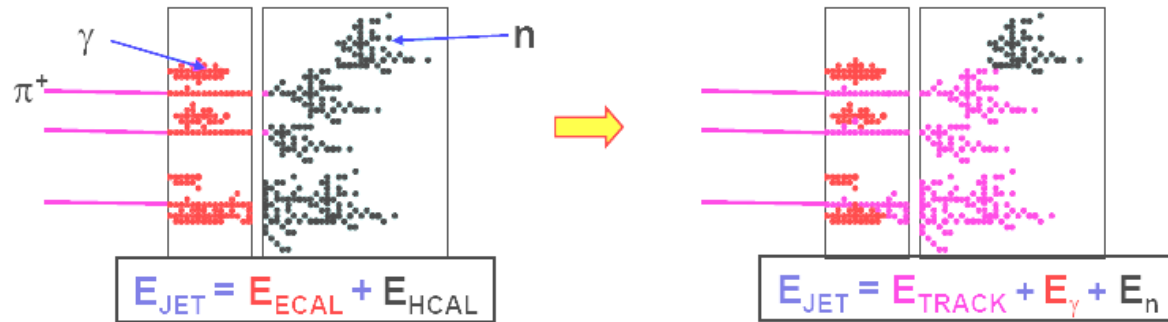

Utilise tracker and calorimeter information

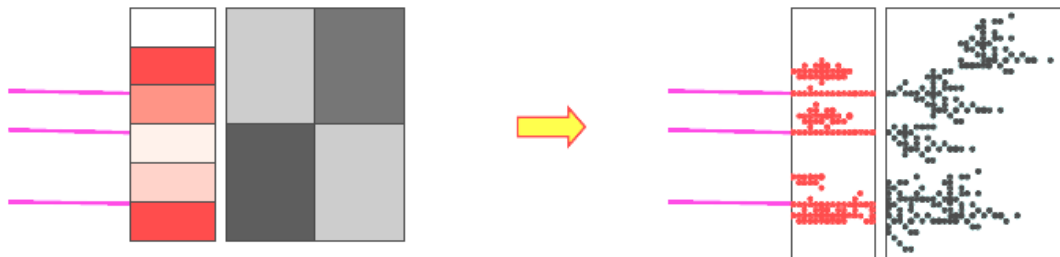

Spatial Resolution in Calo is essential

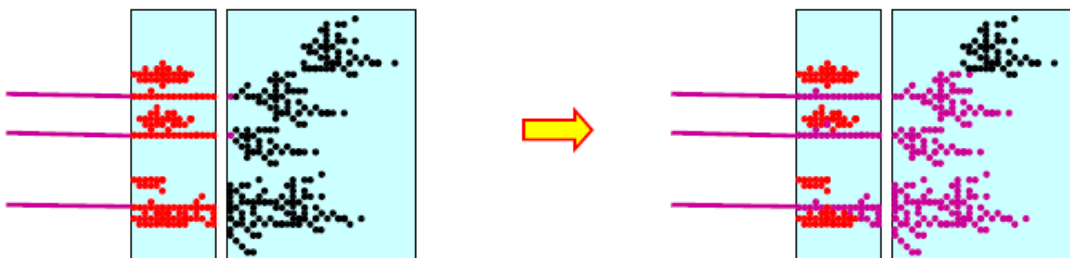

Software to exploit the granularity is very important

Pictures by M. Thompson, Cambridge

Factors Contributing to Jet mass resolution

$$e^+ e^- \rightarrow Z^0 \rightarrow q \bar{q} \text{ at } 91.2 \text{ GeV}$$

Studies by
P. Krstonosic

Effect	σ [GeV] separate	σ [GeV] not joined	σ [GeV] total ($\%/\sqrt{E}$)	σ to total
$E_v > 0$	0.84	0.84	0.84 (8.80%)	12.28
$Cone < 5^\circ$	0.73	1.11	1.11(11.65%)	9.28
$P_t < 0.36$	1.36	1.76	1.76(18.40%)	32.20
σ_{HCAL}	1.40	1.40	2.25(23.53%)	34.12
σ_{ECAL}	0.57	1.51	2.32(24.27%)	5.66
M_{neutral}	0.53	1.60	2.38(24.90%)	4.89
M_{charged}	0.30	1.63	2.40(25.10%)	1.57


HCAL becomes very important for ultimate precision

The ideal PFLOW calorimeter

- Extremely dense (small Moliere Radius)
- Extremely granular (particle separation)

Traditional energy
resolution is important

but not so critically

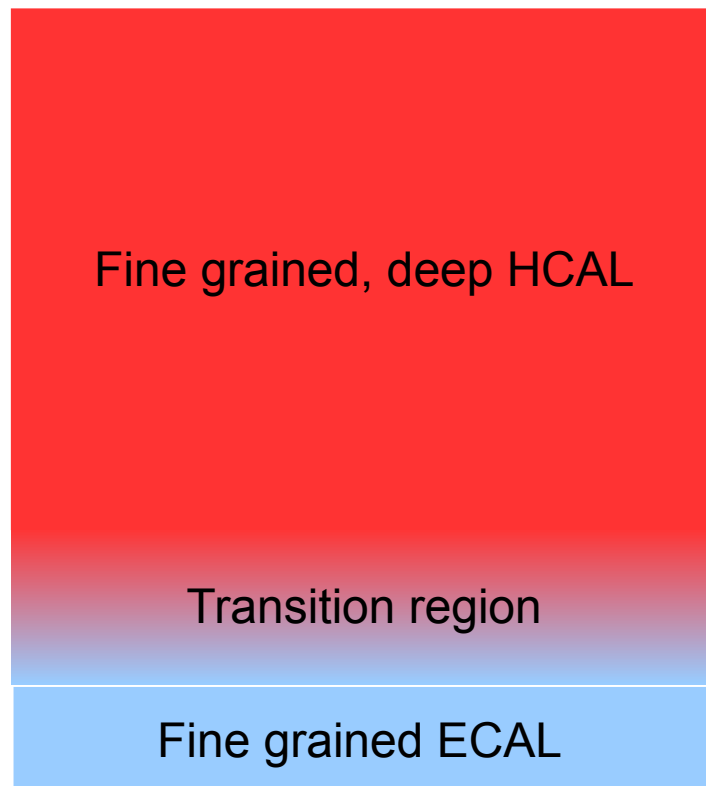

containment

Granularity and
longitudinal sampling


As deep as possible

Granularity: "tracking"


PFLOW ECAL

Typical granularity for ECAL: 0.5cmx0.5cm to 1cmx1cm,
SI detectors, Tungsten absorbers

- 30 layers, $24 X_0$

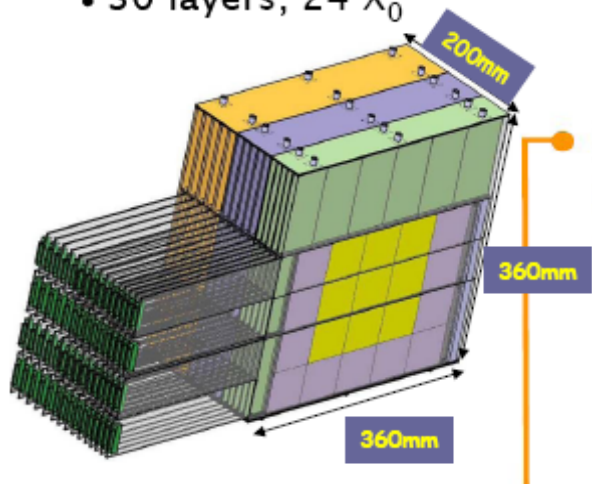


CALICE prototype

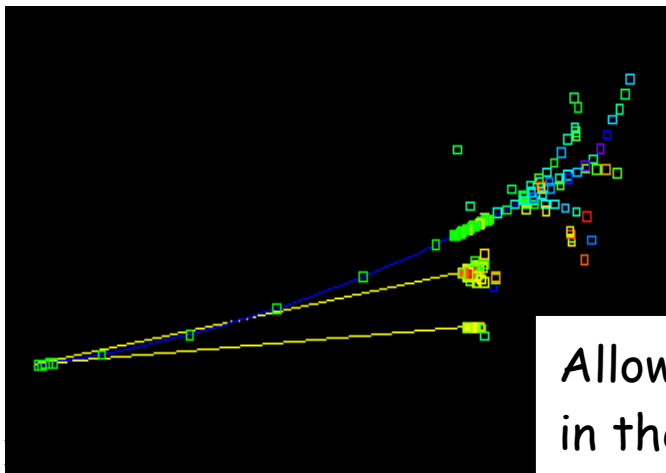

Allows "tracking"
in the calorimeter

Extreme direction:
MAPS sensors in the ECAL

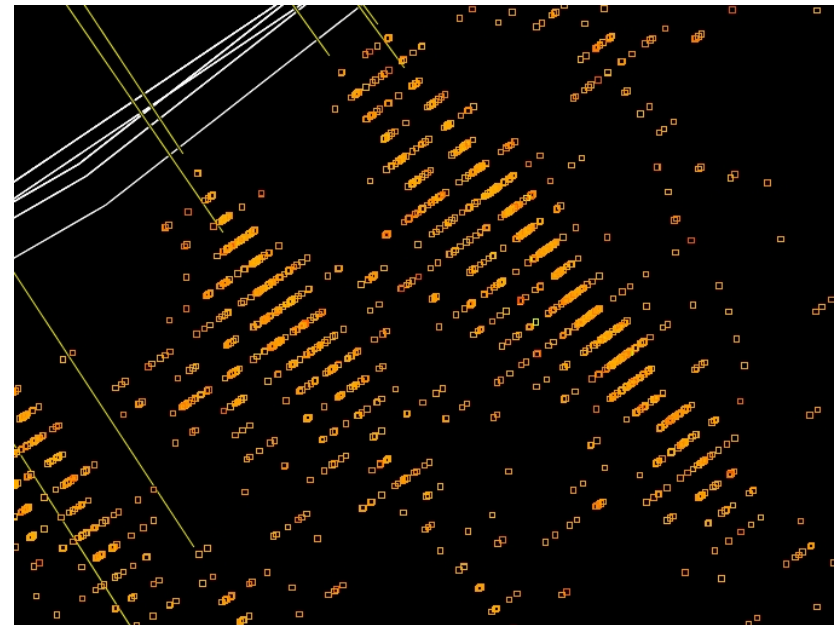




Very detailed shower images

HCAL plays crucial role in a particle flow calorimeter

Simulation of hadronic shower is problematic

Typical cell sizes $3 \times 3 \text{ cm}^2$ with analogue readout


Digital option investigated (smaller cells, 1bit readout)

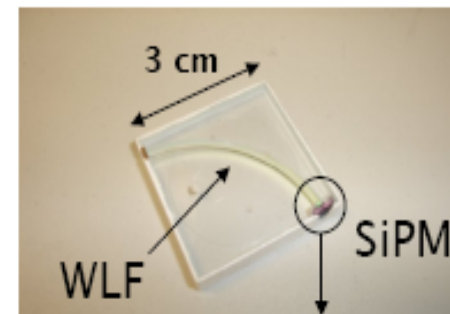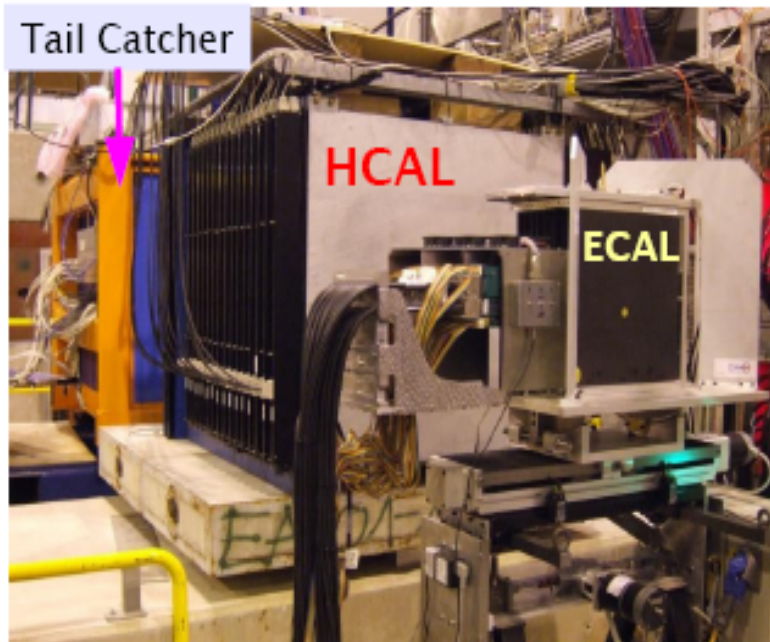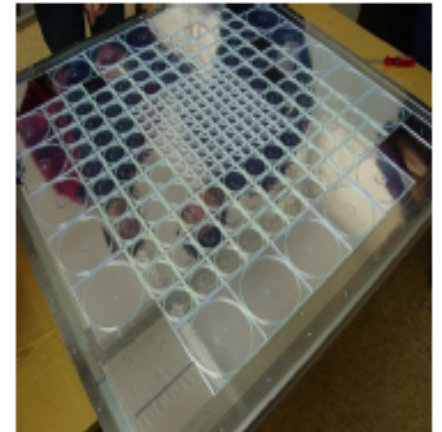

Major effort (CALICE) to prototype such a calorimeter for the ILC

Putting it together

$ZHH \rightarrow qqbbbb$ event at 500 GeV

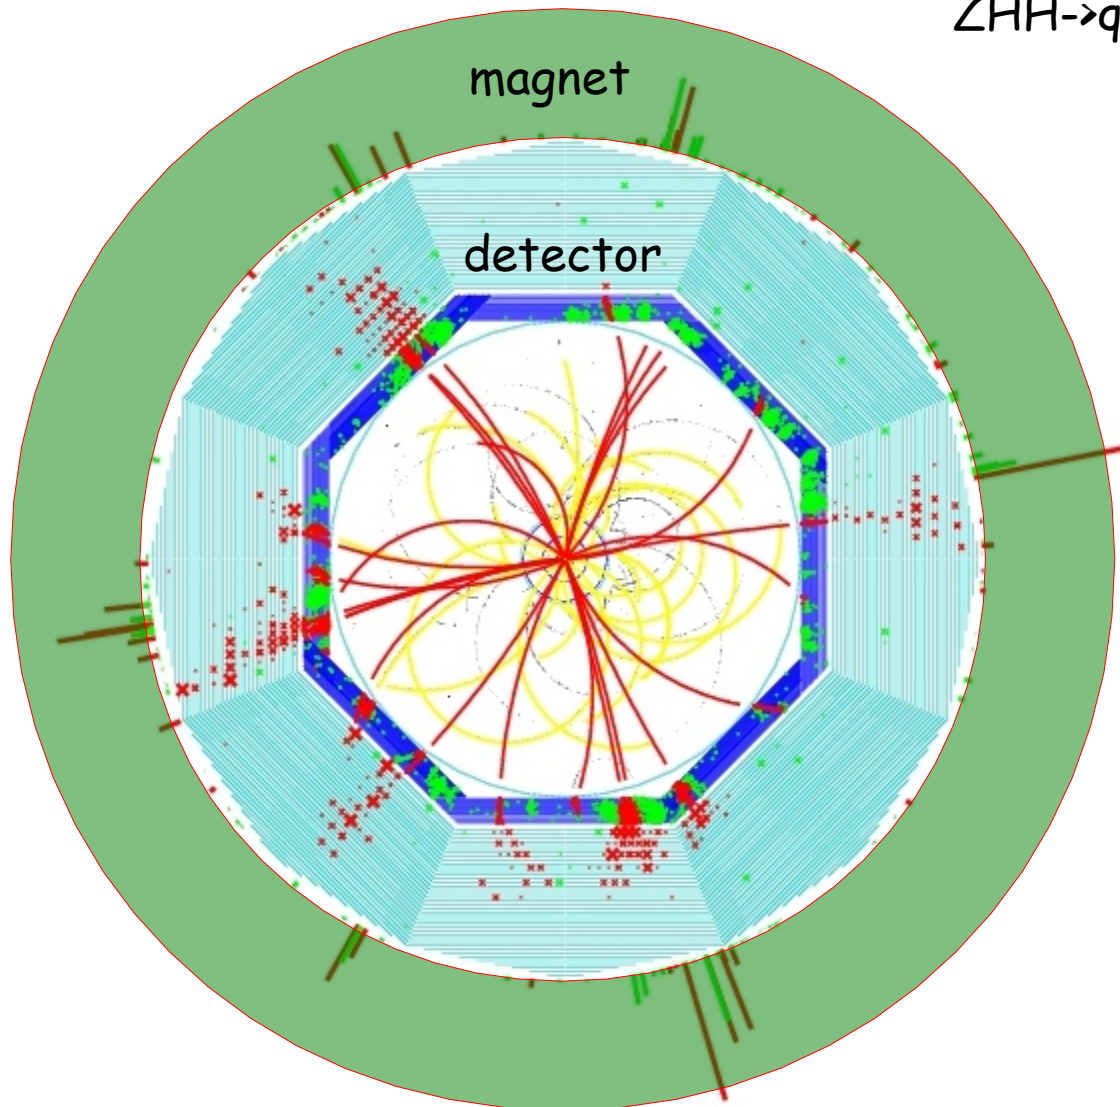

Powerful vertex/ tracking/
calorimeter


put all this into a strong
B field

have some muon
ID on the outside


I have not talked about the forward
region etc.. sorry

$HH \rightarrow qqbbbb$

How well does it work?

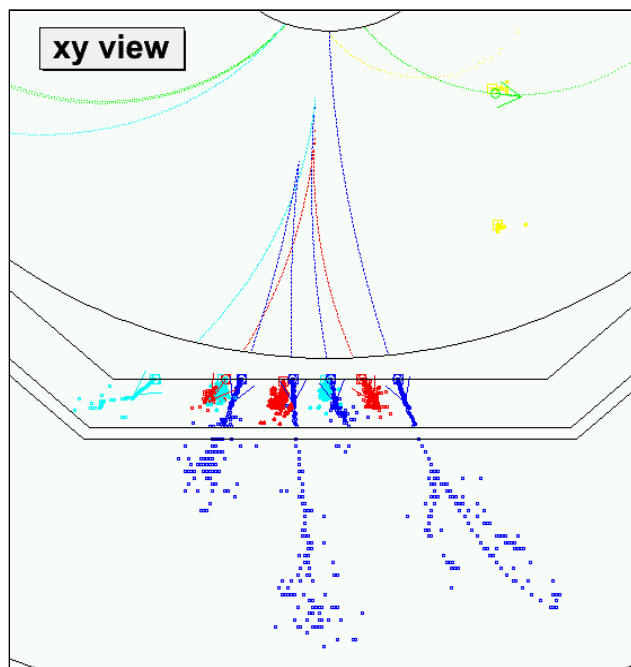

Simulation of an event

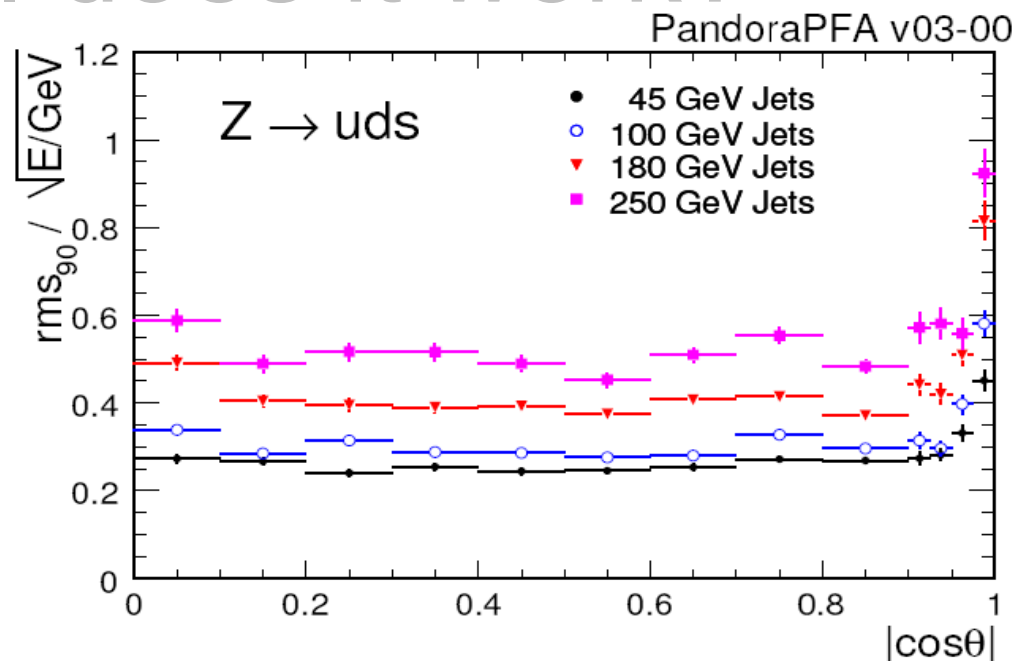



M. Thomson

Resolution about $30\%/\sqrt{E}$ for jets below 100 GeV

Particle flow gives $\sim 2\times$ better performance than traditional approach (<100 GeV jets)


Significant achievement over the last few years

W-Z separation

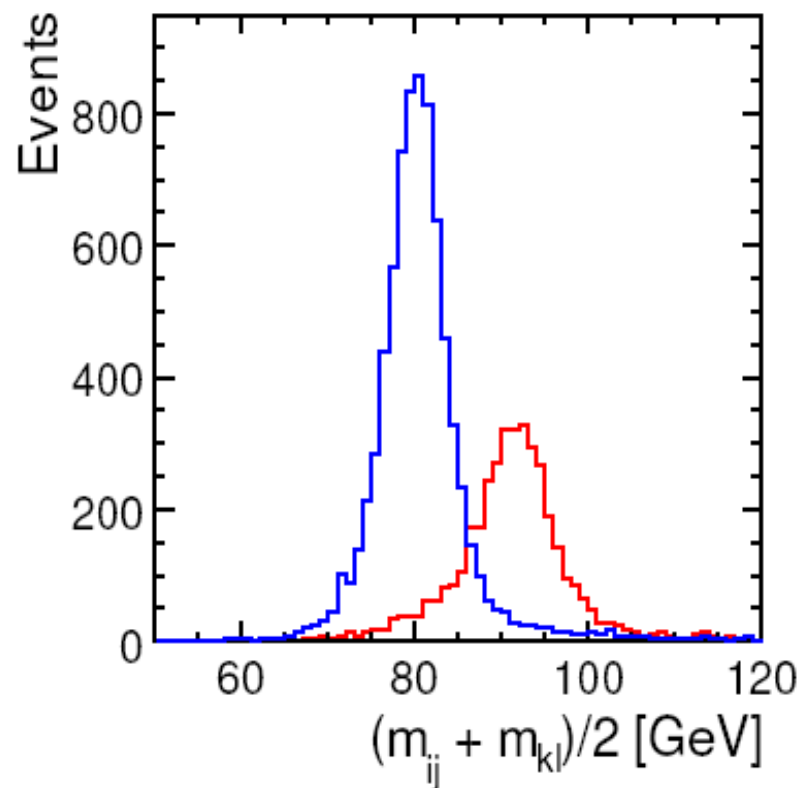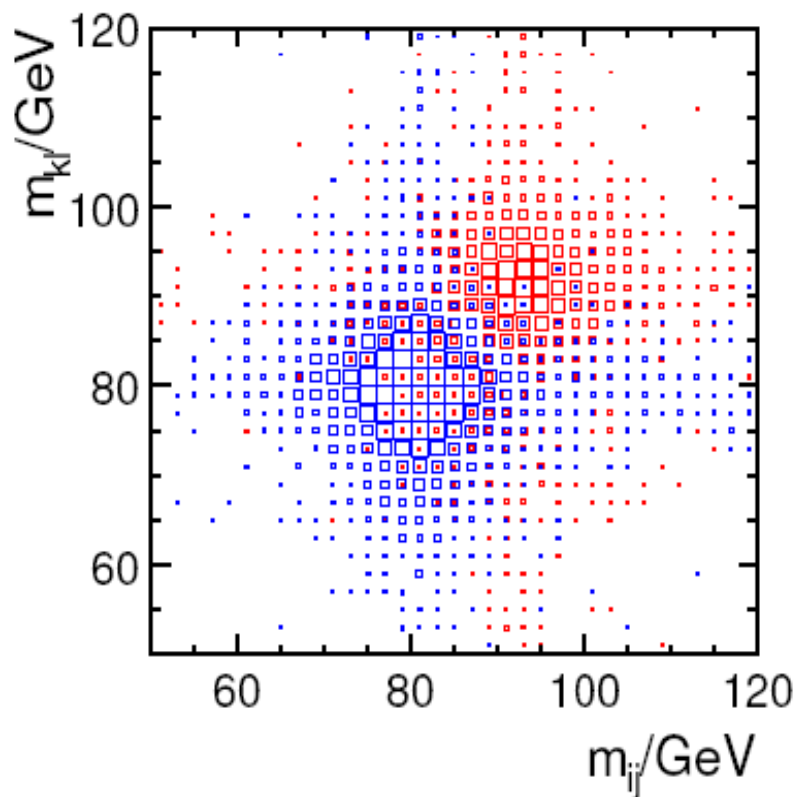


Crucial for many channels (SUSY, others)
Crucial to understand and separate SM from NP

Detector Optimization: ECAL Brient 2004 Thomson 2007

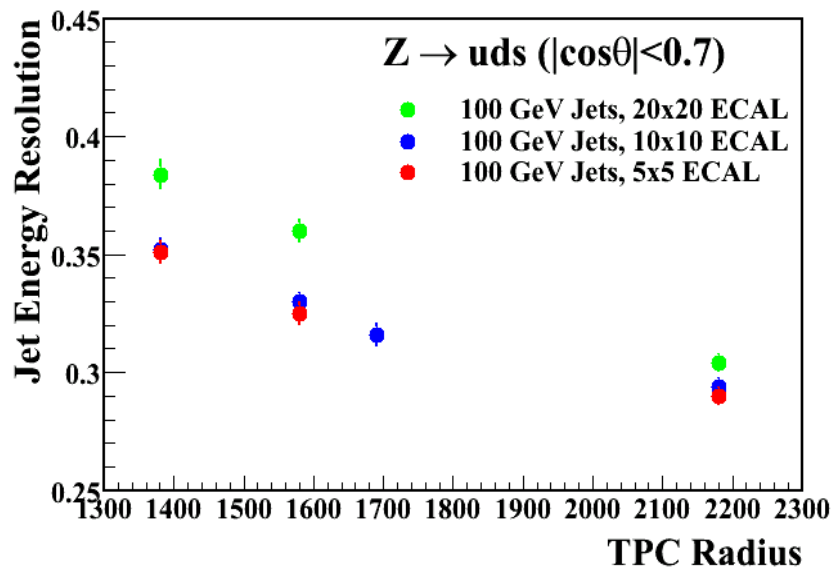

First full reconstruction results

Photon separation
(fraction of second photon within
given distance)

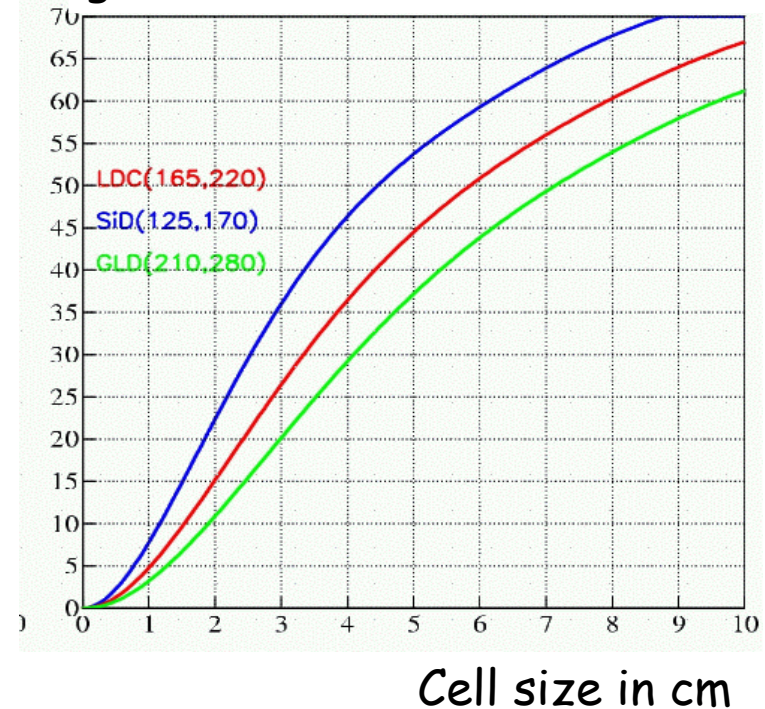


1x1 cm² cell sizes seem reasonable

not a huge gain by smaller cells seen at the moment


Detector Optimization: HCAL

A. Raspereza,
V. Morgunov,
Snowmass 2005

HCAL optimization:
reconstruction of overlapping hadronic showers


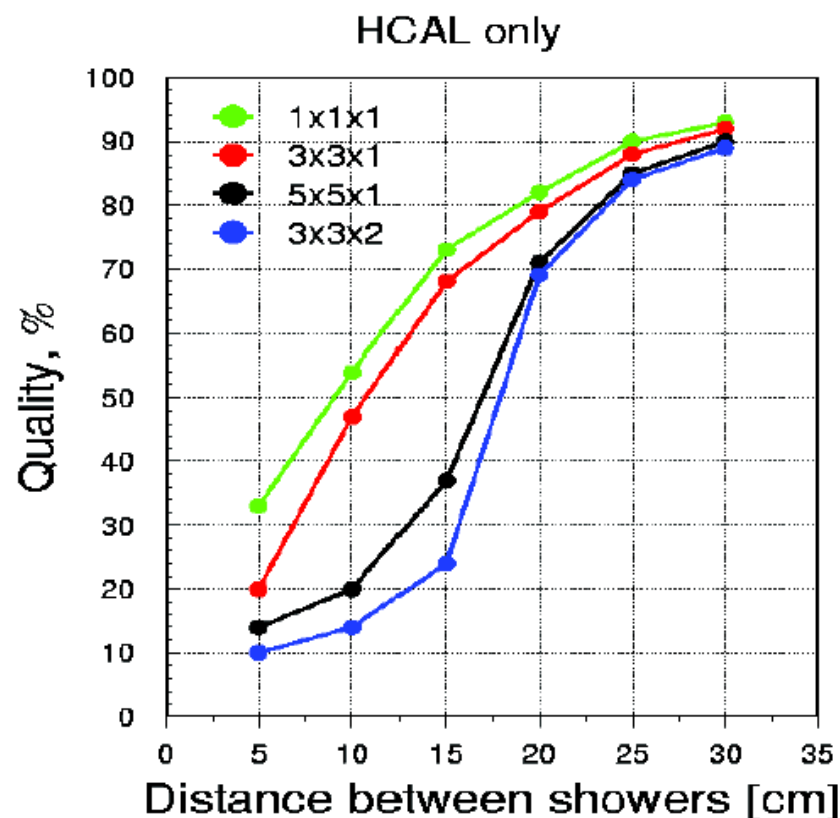


Two showers : π^+ 10GeV, K_L^0 10GeV

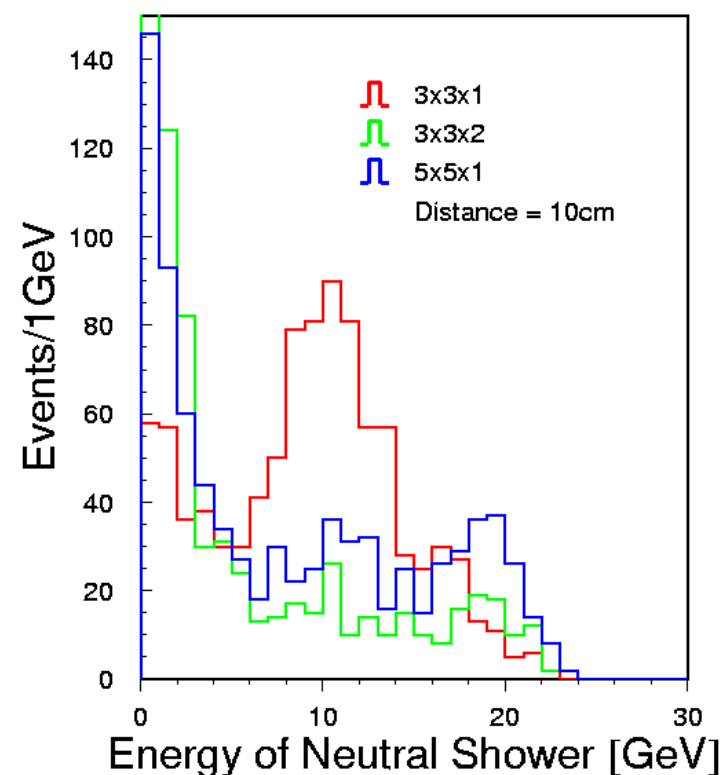


Detector Optimization: HCAL

M. Thomson,
Paris 2007

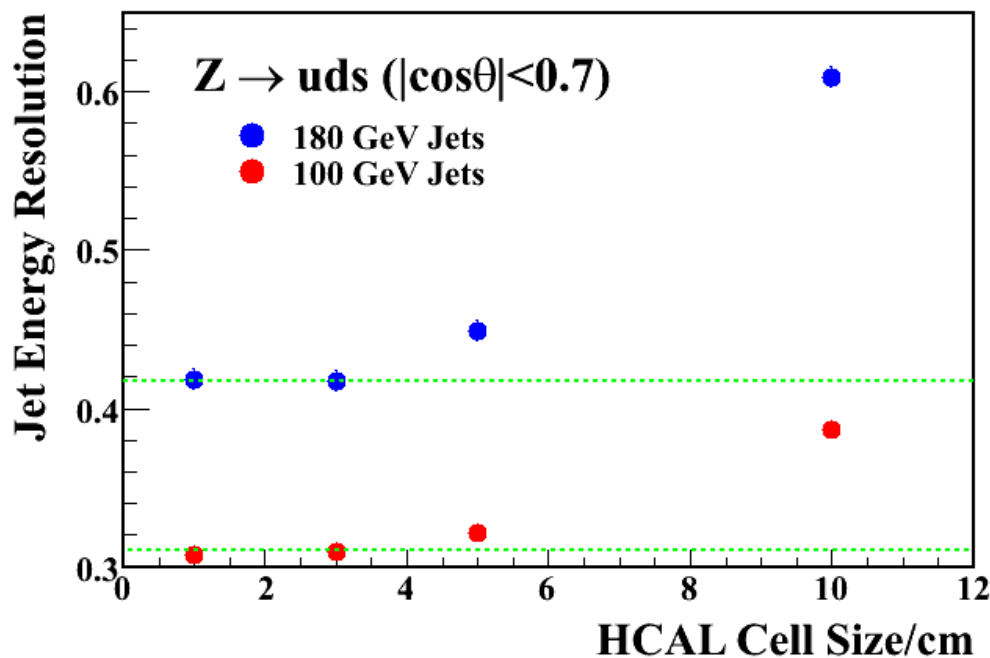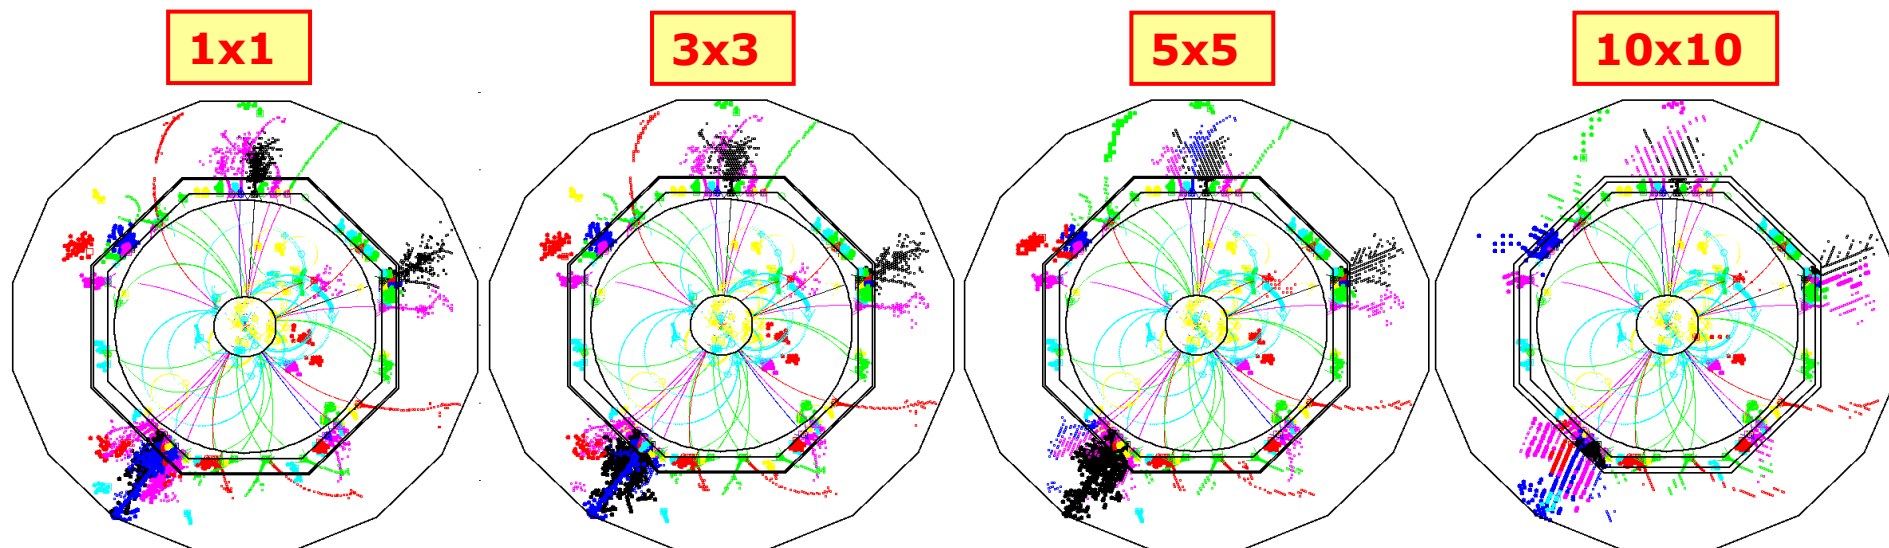

“Preliminary Conclusions”


- ♦ 3x3 cm² cell size ok
- ♦ No advantage -> 1x1 cm²
 - physics ?
 - algorithm artefact ?
- 5x5 cm² degrades PFA

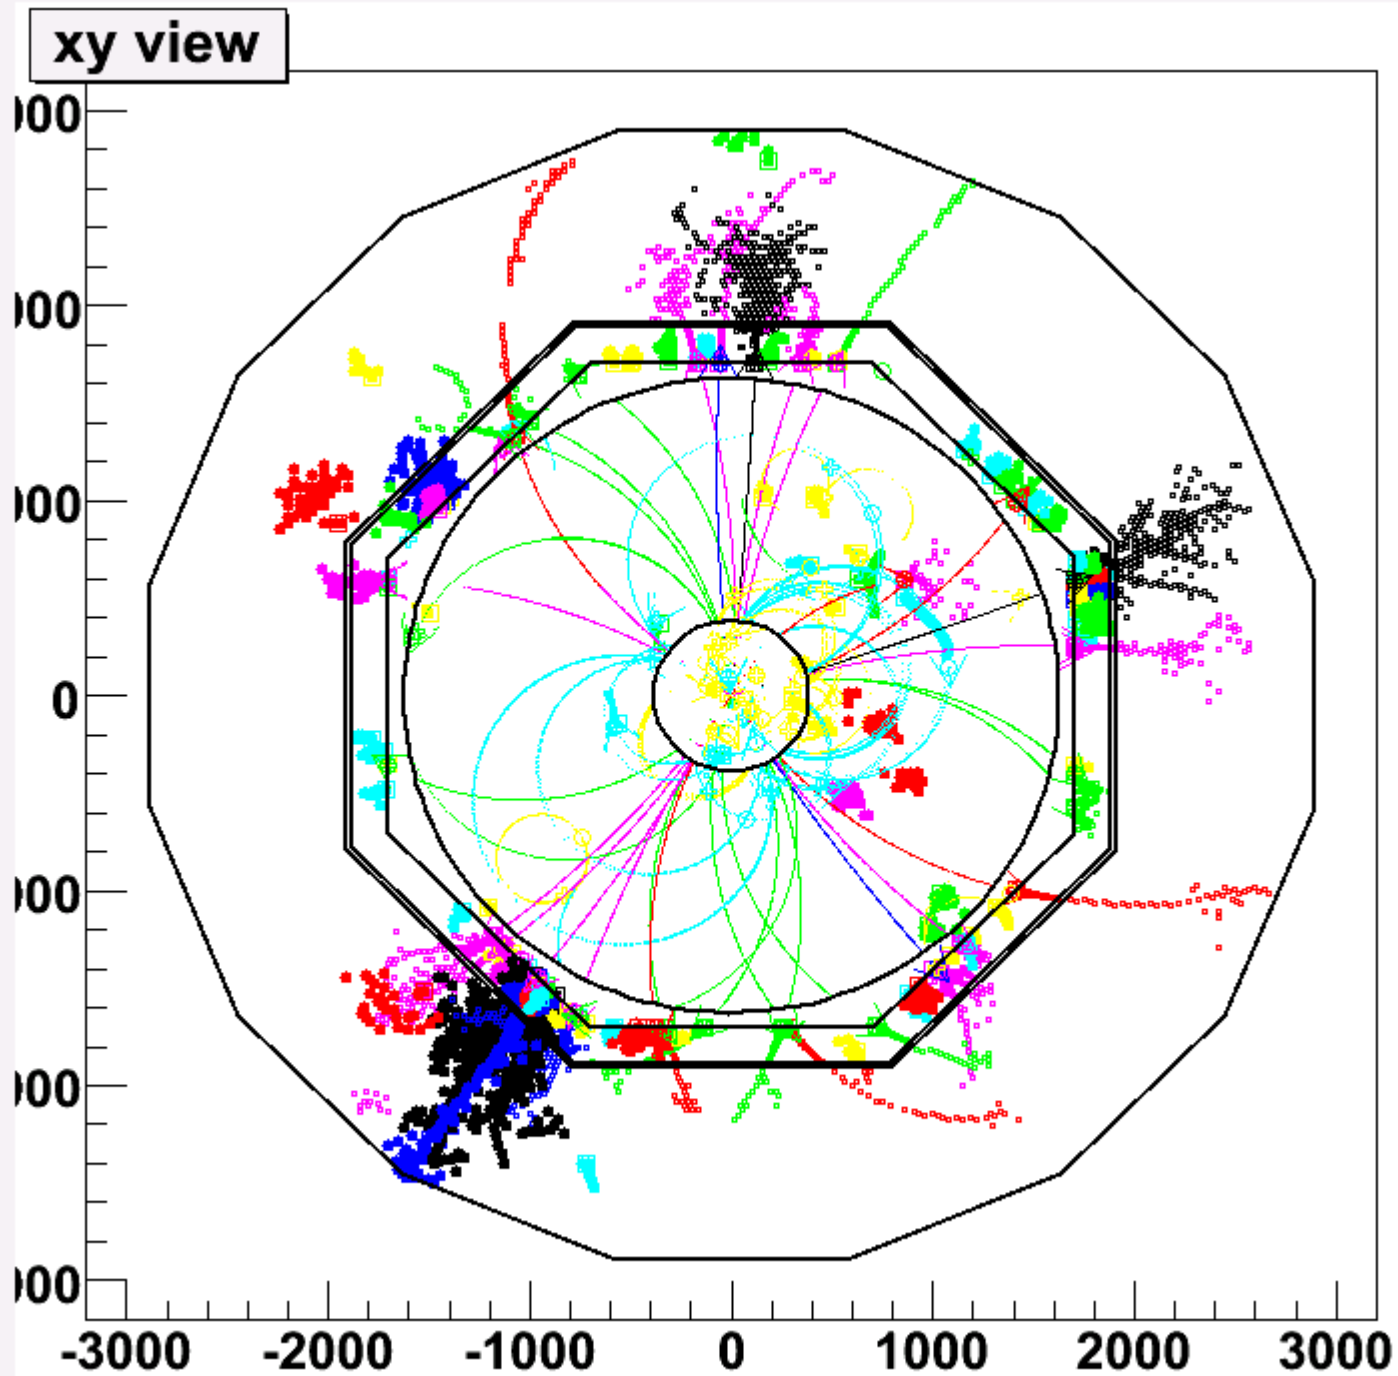

Two Detectors

Additional complication:


One interaction region,
but two detectors:

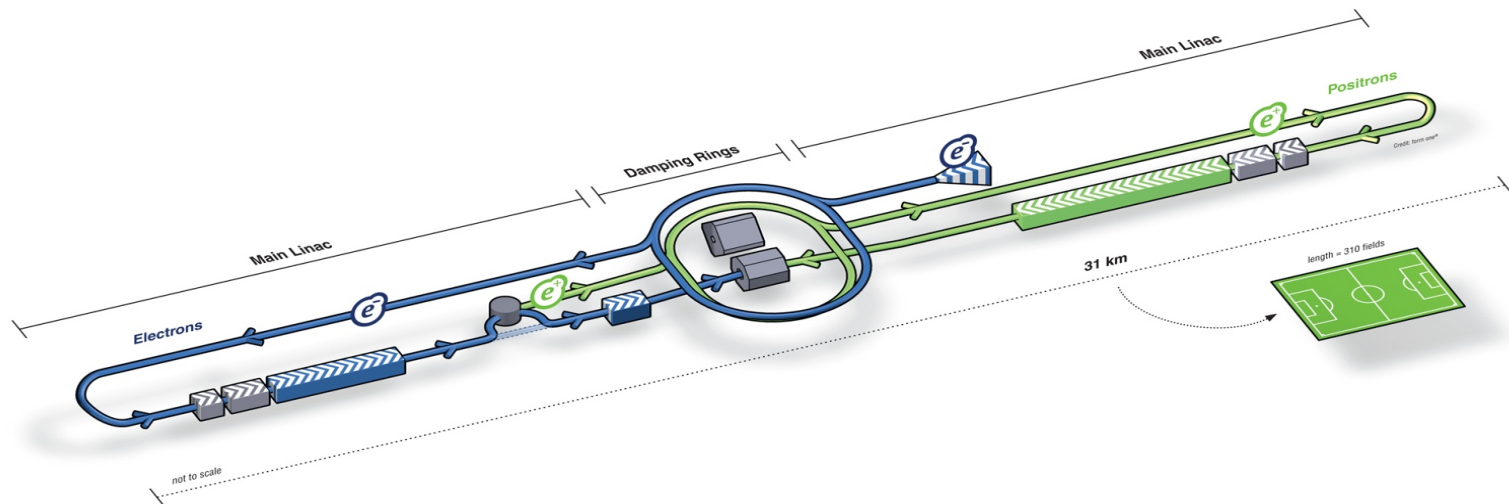

Two Detectors

Additional complication:

One interaction region,
but two detectors:

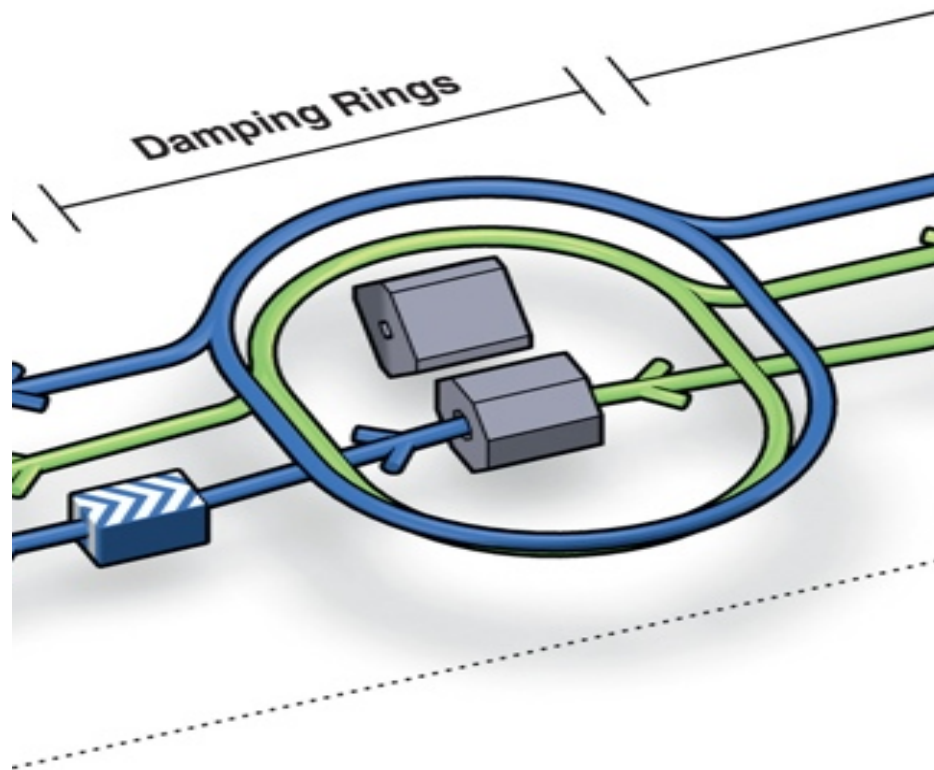


Two Detectors: Push Pull

Additional complication:

One interaction region,
but two detectors:

push pull operation anticipated

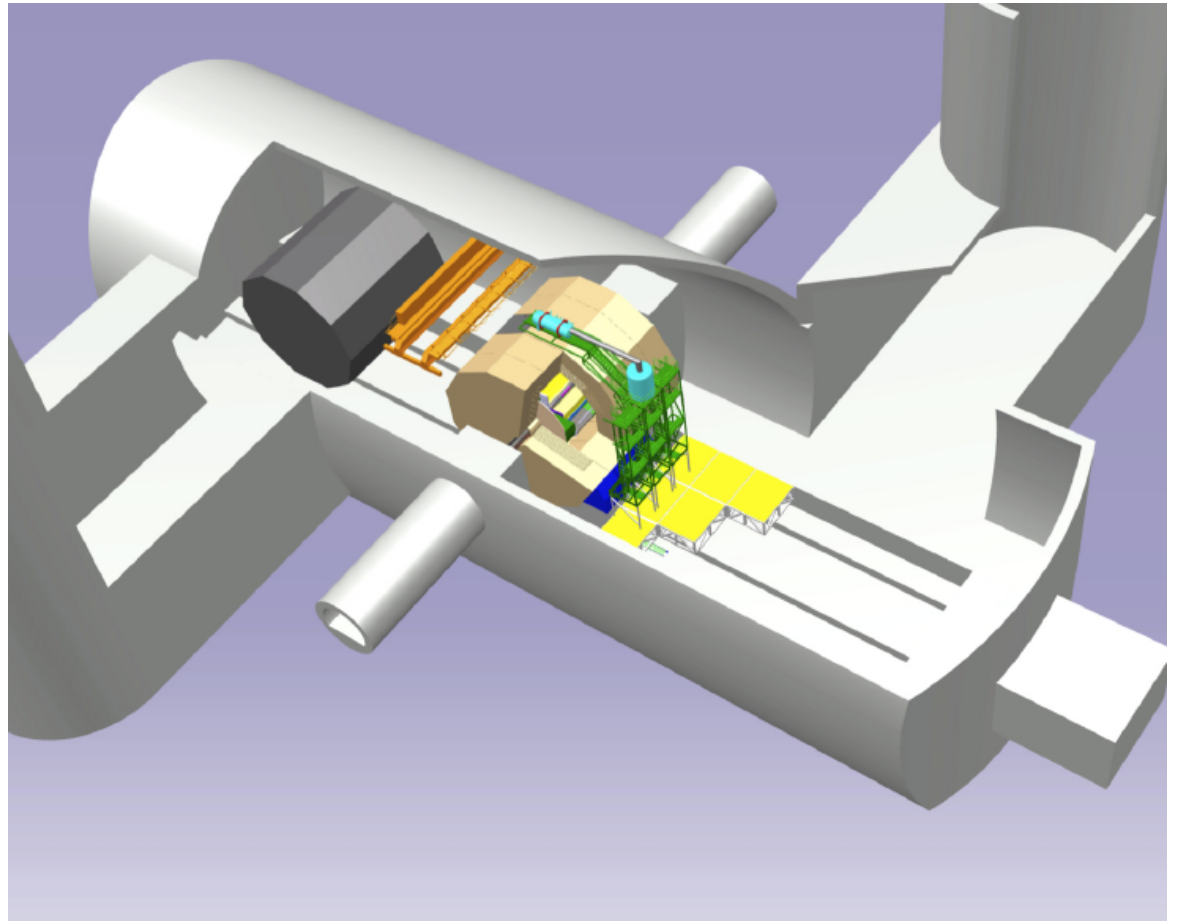

Conclusions

- Linear Collider offer complementary strength to LHC
- Wide range of physics topics can be studied at the LC
- LC is indispensable for precision studies and to determine and distinguish models
- Detectors at LC are a significant challenge
- Accelerator is developed in international collaboration

Of course a lot will depend on the LHC and its findings,
But in a few years we should know which LC we need to build